

Canopy Light

Perfect performance for the application in indoor parking lots, underground and building parking car places, public areas, corridors, and underground passageways. With a unique round shape heatsink, made of die-cast aluminum, this fixture features a highly reliable LED light engine, suitable for indoor and outdoor applications and an impact resistant optical diffuser due to the IP65 condition and an optional built-in Daylight sensor to activate the light when it is really needed. The low profile design offers an architectural appeal and its flat dome-shaped lens assures a wide 150° beam angle for uniform light distribution.






Features and Benefits

- High efficiency up to 130lm/w
- IP65 for all environmental conditions
- Different Color Temperature Available (3000k, 4000k, 5000k, 6000k)
- Up to 50,000 hours lifespan
- CE, RoHS, UL pending, cUL pending, DLC Premium pending certifications
- 5 years warranty

Applications

- Garages
- Parking lots
- Entrance areas and walkways
- Stairways
- Storage areas

Color Temperature

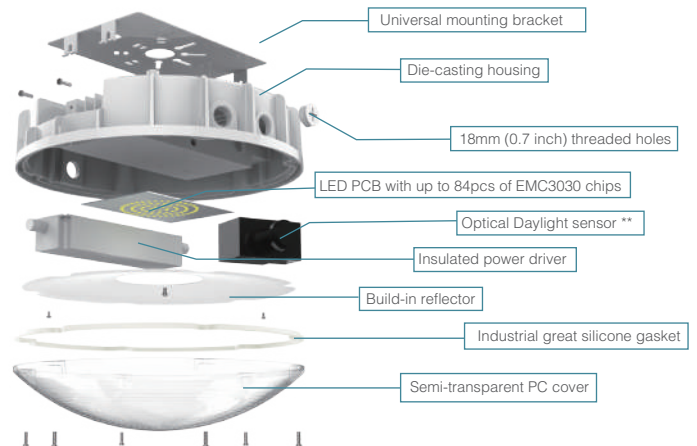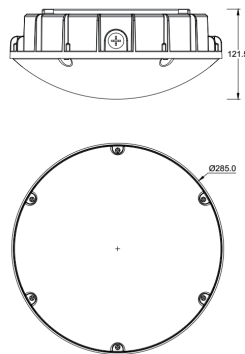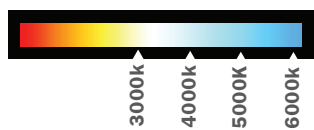

Technical Parameters

Product Code	Watts	Lumens	Voltage	Dimensions	Life Time	Efficiency	Power Factor	CRI	IP	Beam Angle	Color temperature
ZL60WCP50KUL	60W	7800lm	AC100-277V	Φ285*121.5mm	5000 hrs	>90%	>0.9	>80	IP65	150°	5000K
ZL40WCP50KUL	40W	5200lm	AC100-277V	Φ285*121.5mm	5000 hrs	>90%	>0.9	>80	IP65	150°	5000K

Optional

DSensor Optical Daylight sensor **

NOTE: Diferent color temperature available.
3000k - 4000k - 5000k - 6000k

For installation and safety notes visit: www.zolulighting.com