




LED Linear Light IP69K

As an extremely durable and highly vigorous light fixture, the LED Linear Light IP69K is the ideal solution for production areas, parking lots, gardens, and other places where harsh conditions have to be counteracted. Thanks to its polycarbonate shell casted from a single mold and its massive internal aluminum core, the fixture is completely dust/waterproof, has great stability, and assures good thermal conditions. The removable end caps housing the connection terminals allow quick and easy installation as well as maintenance. The LED Linear Light IP69K may function as a single accessory fixture or in a continuous line setting.

Features and Benefits

- 5 years warranty
- IP69K
- Single installation
- Highly energy efficient - up to 130 lm/w
- High Luminous flux / up to 14.300lm
- Isolated power driver
- No UV or IR and completely mercury free
- Ambient temperature - 30 -+50 °C
- IK09 Protection

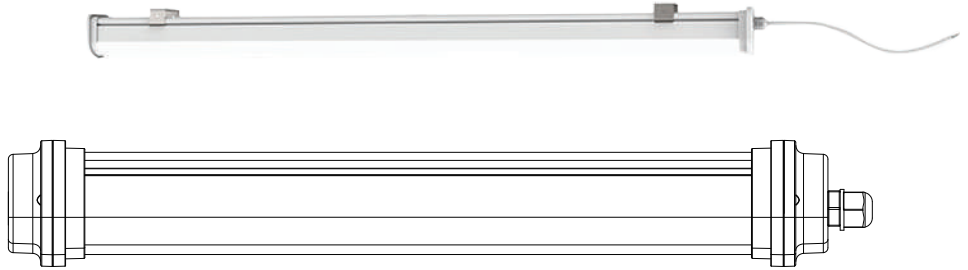


Applications

- Factories and production areas
- Parking Facilities, corridors and hallways
- Warehouses and storage rooms



Color Temperature

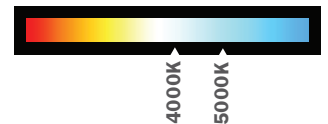

Technical Parameters

Product Code	Watts	Lumens	Voltage	Life Time	Color Temperature	CRI	Dimension	Beam Angle	Grade	Warranty	Certificates
ZL30WLL06M50K	30W	3900lm	100-277V	50000 hrs	5000k	>80Ra	560x72x78mm	120°	IP69K	5 years	CE / ROHS
ZL40WLL12M40KUL	40W	5400lm	100-277V	50000 hrs	4000K	>80Ra	1170x72x78mm	120°	IP69K	5 years	UL
ZL60WLL12M50KUL	60W	7800lm	100-277V	50000 hrs	5000K	>80Ra	1170x72x78mm	120°	IP69K	5 years	UL
ZL60WLL12M40KUL	60W	7800lm	100-277V	50000 hrs	4000K	>80Ra	1170x72x78mm	120°	IP69K	5 years	UL
ZL80WLL24M50KUL	80W	10800lm	100-277V	50000 hrs	5000K	>80Ra	2370x72x78mm	120°	IP69K	5 years	UL
ZL110WLL24M50KUL	110W	14300lm	100-277V	50000 hrs	5000K	>80Ra	2370x72x78mm	120°	IP69K	5 years	UL

- Option: **-EB** Emergency battery included 10W, 90 Minutes

For installation and safety notes visit: www.zolulighting.com