



LED Wall pack Adjustable Angle CCT & Wattage Selectable

Features and benefits





- ZOLU Lighting quality and reliability
- Field-adjustable 3CCT & 4 wattage to reduce SKU's
- IP65 aproved - 50,000hrs lifespan
- Work with AC120-277V directly
- Polycarbonate lens & die-cast aluminum housing for long last time using
- Light Distribution: Type III
- Operating temperature -40°C to 50°C
- Surge Protection: L/N 6KV, L/N-P 6KV
- Automated Dusk to Dawn photocell functionality

Applications

- Parking lots, storage areas, outdoor aisles
- Walkways, entryways

Technical specifications

Product code	Power selectable	Light output	Dimmable	Beam angle
ZL80CWAWP30D3CCT	80W / 60W / 50W / 40W	12000lm max.	0-10V	Type III

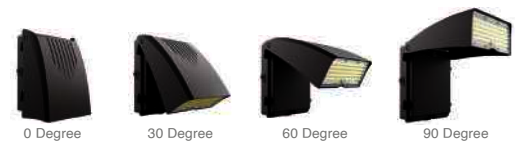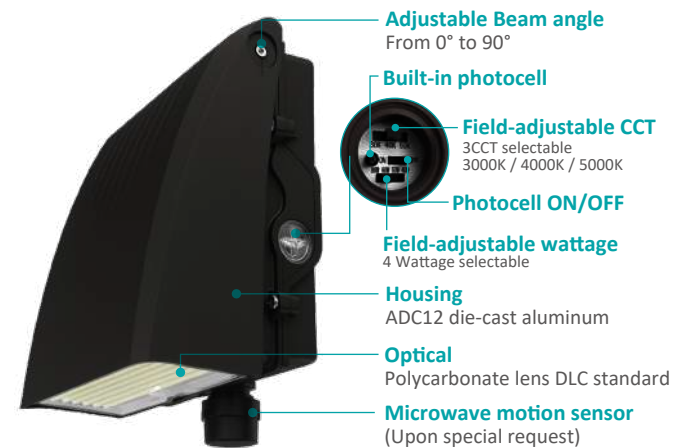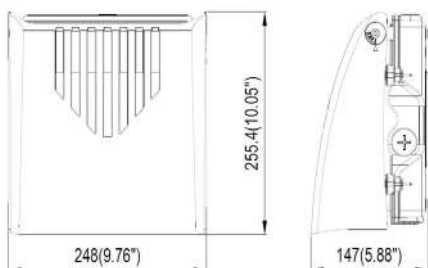

Main voltage	AC120-277V 50/60Hz
Power factor	≥0.90
Efficiency	150lm/W
Beam angle	Type III
THD	<20%
CRI	Ra>80
Housing	Die-cast aluminum, polycarbonate lens
IP protection	IP65
CCT	3000K / 4000K / 5000K selectable
Certificates	UL/uCL, DLC 5.1 Premium
Life time	>50,000 Hrs
Warranty	5 Year



LED Wall Pack Adjustable Angle CCT & Wattage Selectable

WARNING


1. Read all product labels and directions.
2. Risk of fire or electric shock. LED WALL PACK installation requires knowledge of luminaries electrical system.
3. Use a qualified electrician for installation of this lighting fixture.
4. Before installing the fixture disconnect power by shutting off the circuit breaker or by removing the fuse at the fuse box.
5. All electrical connections must be in accordance with local and National Electrical Code.
6. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
7. Intended for mounting in an indoor/outdoor application. Suitable for damp locations.
8. Switch ON only after complete installation and examination of the circuit.



Turn OFF power supply before starting any installation or maintenance.


Read instructions and check you have all the tools and accessories to complete the installation correctly.

Installation




Instructions

1. Unscrew door with Phillips screwdriver by loosening (2) screws. Confirm junction box size and junction box mounting provisions to that of the light fixture.
2. Attach the light fixture to the junction box or mounting surface.



3. Attach the appropriate wires to the light fixture wires, green to green, black to black and white to white. Secure each pair with a wire nut.
4. Close the door and tighten (2) screws on the door lens. Nothing should be trapped in the gasket sealing area when door is closed.

Wiring Diagram:

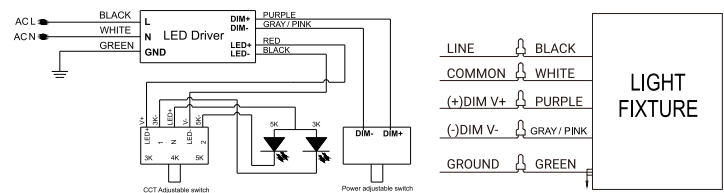

Wiring Instructions

Warning: TURN OFF POWER BEFORE CONNECTING WIRES.

Black wire connect to L, White wire connect to N, Green wire connect to GROUND. For 0-10V Dimming, the wiring direction as below:

1. Turn off the power.
2. Connect the Black wire with the Line.
3. Connect the WHITE wire with the COMMON.
4. Connect the GREEN wire with the GROUND.
Caution: DO NOT connect the GRAY / PINK (-) DIM V- wire with GROUND.
5. Connect the PURPLE wire with the (V+) DIM.
6. Connect the GRAY wire with the (V-) DIM.

· NOTE: To change the color temperature or wattage, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.



ADJUSTABLE POSITIONS

