




LED Emergency Fixture ZLSALIDA01

Features and benefits

- Zolu Lighting quality and reliability
- UL Certificate
- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall and ceiling mounting
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Super bright SMD LED 2W
- Insulation: II, Range: 80m²


Applications

- Suitable for emergency lighting applications such as stairways, hallways and corridors



Technical specifications

Product code	Power	Light output	Backup time
ZLSALIDA01	2W max.	120lm	≥90 min

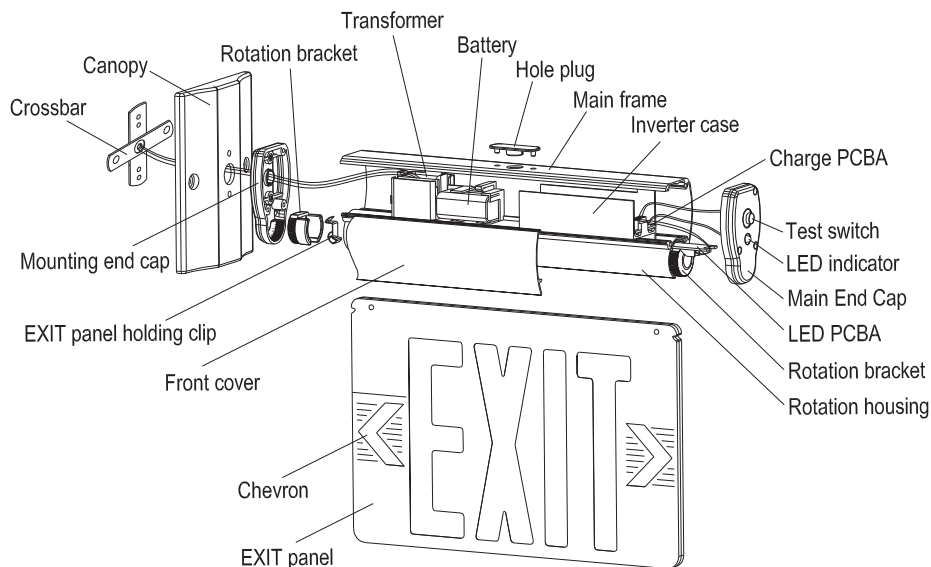

Main voltage	AC120-277V 60Hz
Power consumption	0.5W max.
Efficiency	60lm/W
Battery	3.6V Nickel Cadmium 350mAh
Charging time	24 hrs
Housing	Injection-molded thermoplastic ABS
Operating temperature	0°C~40°C
CCT	5000K
Certificates	UL
Warranty	2 Year

LED Emergency Fixture ZLSALIDA01


WARNING

1. Use a qualified electrician for installation of this lighting fixture.
2. Before installing the fixture disconnect power by shutting off the circuit breaker or by removing the fuse at the fuse box.
3. All electrical connections must be in accordance with local and National Electrical Code.
4. Switch ON only after complete installation and examination of the circuit.



Turn OFF power supply before starting any installation. Read instructions and check you have all the tools and accessories to complete the installation correctly.

Part	Description	Quantity
1	LED Edge-Lit EXIT Sign	1
2	Canopy	1
3	Hardware Bag	1


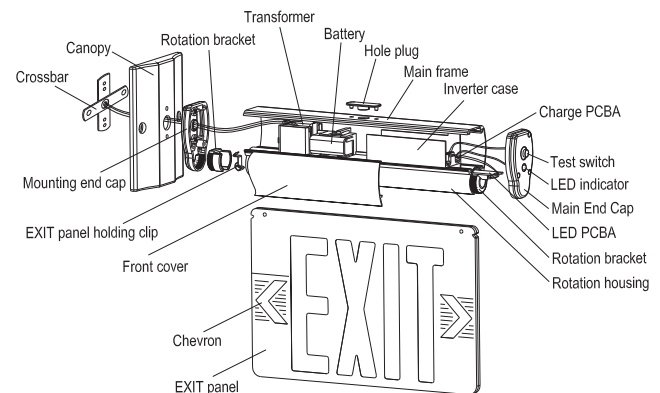


IMPORTANT SAFEGUARDS

1. Review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances and the National Electric code.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Do not use outdoors.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surface.
7. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
8. The use of accessory equipment not recommend by the manufacturer may cause an unsafe condition.
9. Do not use this equipment for other than intended use.
10. All servicing should be performed by qualified personnel only.
11. Allow battery to charge for 24 hours before first use.


ELECTRICAL CONNECTIONS

- *Make the proper AC wire
- *If using 120VAC, connect the black white wires to the building utility.
- *If using 277VAC, connect the orange and white wires to the building utility.
- *Cap off unused wires in all cases, use standard wires nuts to connect to wires.

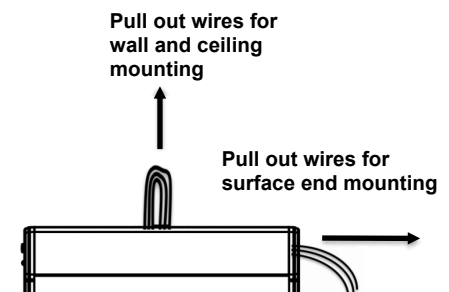

LED Emergency Fixture ZLSALIDA01

Surface ceiling & wall mounting installation instructions

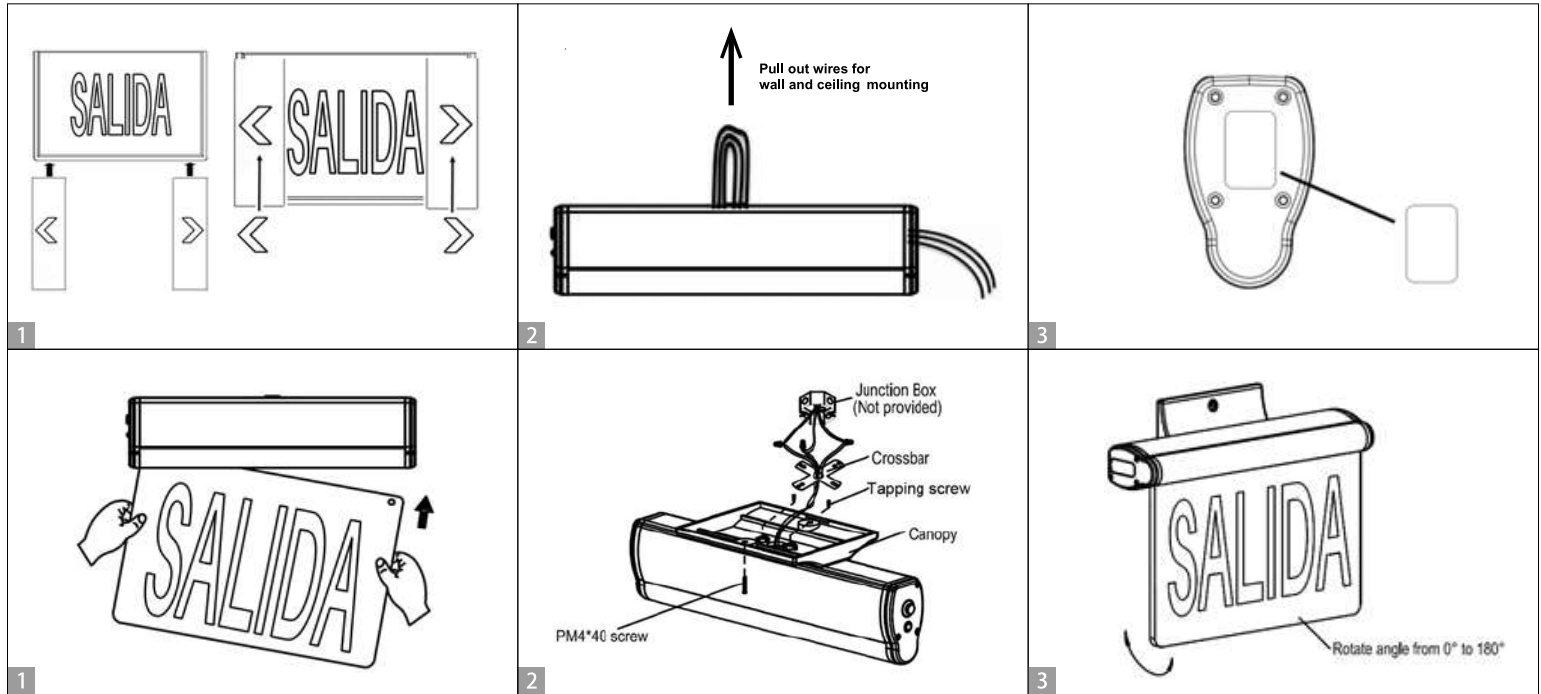

Surface end mounting installation instructions

