



Post Top PTPC

The Zolu Lighting Post Top PTPC LED lights are the crowning feature of any outdoor landscape or streetscape, making it the perfect exterior lighting solution. These outdoor fixtures feature the traditional character with updated styling and superior photometric performance. Its IP66 and IK09 rating ensures that no water will ever get inside the fixture, and improve safety by providing a uniform ambient light to downtown spaces, commercial developments, parks, and residential communities by increasing visibility for pedestrians. The dome of the luminaire, which incorporates the LED module and the driver, is fully replaceable so you can benefit from future developments in LEDs and their associated efficiencies.





Features and Benefits

- ETL/CE/RoHS/DLC Certificate
- 5 Year Warranty
- >70 CRI
- IP66 and IK09 Rated
- Self-cleaning and Tool free entry
- Operating temperature -30+35°C
- Suggested installation height 2.5m to 6.0m

Applications

- Landscape and streetscape lighting for parks, walkway, commercial office buildings, and gathering areas

Color Temperature

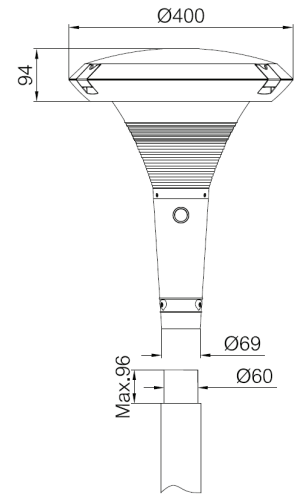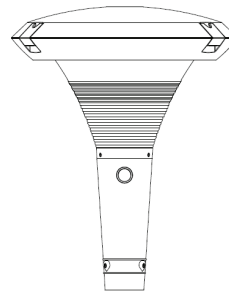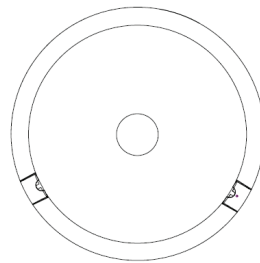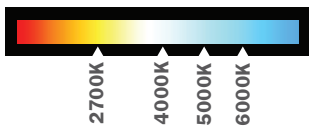

Motion-sensor



Photocell



PIR sensor

Technical Parameters

Product Code	Watts	Lumens	Voltage	Dimensions	CRI	Color temperature	IP	IK	Warranty	Certificates
ZL25WPTPCXXKETL	25W	2875lm	100-277 V	0.76 sq. feet	>70	2700k/4000k/5000k/6000k	IP66	IK09	5 year	ETL/CE/RoHS
ZL35WPTPCXXKETL	35W	3700lm	100-277 V	0.76 sq. feet	>70	2700k/4000k/5000k/6000k	IP66	IK09	5 year	ETL/CE/RoHS
ZL60WPTPCXXKETL	60W	6630lm	100-277 V	0.76 sq. feet	>70	2700k/4000k/5000k/6000k	IP66	IK09	5 year	ETL/CE/RoHS
ZL80WPTPCXXKETL	80W	8880lm	100-277 V	0.76 sq. feet	>70	2700k/4000k/5000k/6000k	IP66	IK09	5 year	ETL/CE/RoHS

- XX: denote the color temperature, when is XX = 27-40-50-60, stands for 2700k - 4000k - 5000k - 6000k
- Motion-sensor, Photocell and PIR sensor, available upon request.

Warranty based on 12 hours daily use

For installation and safety notes visit: www.zolulighting.com

