



LED Canopy 3CCT

Features and benefits


- ZOLU Lighting quality and reliability
- Field-adjustable 3CCT & wattage to reduce SKU's
- IP65 approved - 50,000hrs lifespan
- Work with AC120-277V directly
- Polycarbonate lens & die-cast aluminum housing for long last time using
- Surge protection LN-PG :5KV, L-N:4KV
- Operating temperature -30°C to 50°C
- Surface or pendant mounting
- No need to consider single end power input or double end power input

Applications


- Parking lots, storage areas, outdoor aisles
- Walkways, entryways, canopies

Technical specifications


Product code	Power selectable	Light output	Dimensions
ZL60CWCPD3CCT	60W / 40W / 30W	8100lm max	256x256x70mm

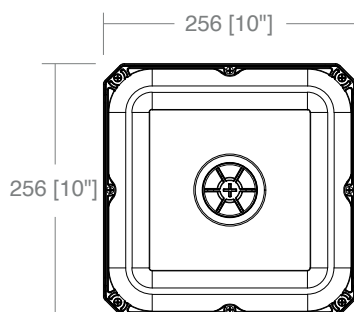

70 [2.75\"]



LED Canopy light are versatile and energy saving fixtures, which are ideal for parking lots, entryways, gas stations, outdoor aisles and many other applications. It comes with color and wattage selectable, allowing you to customize the LED light output to best fit your project. Energy and maintenance savings up to 86% versus HID solutions, and can be easily surface/ pendant mounted. The low profile design offers an architectural appeal and its flat dome-shaped lens assures a wide 145° beam angle for uniform light distribution.

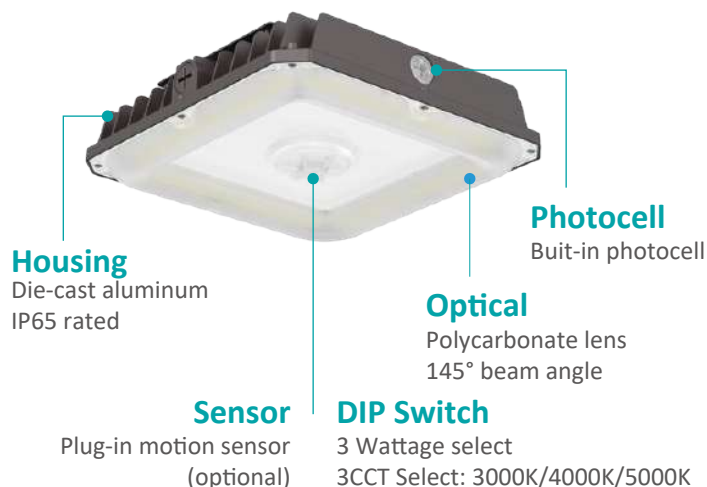

Main voltage	AC120-277V 50/60Hz
Power factor	≥0.95
Efficiency	135lm/W
Dimmable	0-10V Dim
THD	<20%
CRI	Ra>80
Housing	Die-cast aluminum, polycarbonate lens
IP protection	IP65
Beam spread	145°
CCT	3000K / 4000K / 5000K changeable
Certificates	UL
Life time	>50,000 Hrs
Warranty	5 Year

LED Canopy 3CCT Installation

WARNING

1. Read all product labels and directions.
2. Risk of fire or electric shock. LED CANOPY installation requires knowledge of luminaries electrical system.
3. Use a qualified electrician for installation of this lighting fixture.
4. Before installing the fixture disconnect power by shutting off the circuit breaker or by removing the fuse at the fuse box.
5. All electrical connections must be in accordance with local and National Electrical Code.
6. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
7. Intended for mounting in an indoor/outdoor application. Suitable for damp locations.
8. Switch ON only after complete installation and examination of the circuit.



Turn OFF power supply before starting any installation or maintenance.

Read instructions and check you have all the tools and accessories to complete the installation correctly.

Ceiling Installation

1 Remove retaining screw and slide mounting plate and Shield off of light.

2 Attach mounting plate to junction box.



3 Use hanger on the mounting plate to hold light in place and connecting wiring.

Input/Dimmer	Lamp
Green	Green
White	White
Black	Black
Dim-	Pink
Dim+	Purple

4 Slide lamp onto mounting plate.

5 Secure the screw. Installation completed.

· NOTE: To change the color temperature, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.

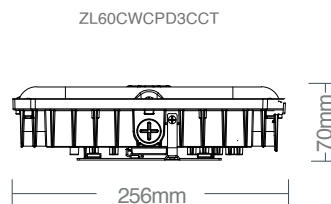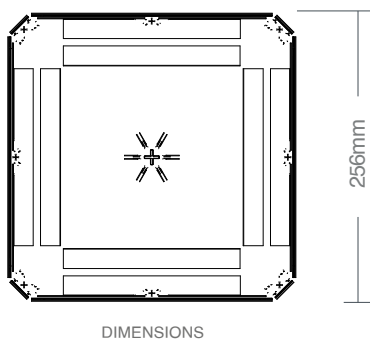

LED Canopy 3CCT Installation

Pole-pendant Installation

1 Connecting wires with terminal caps as pictures shows.

2 Rotating the pipe to make it fixed with lamp. Installation completed-

Selectable CCT and wattage function installation

1 Unscrew the cap.

2 Adjust the CCT Selectable DIP switch or the wattage selectable DIP switch accordingly.

3 Tighten the cap .

Sensing function installation

1 Unscrew the cap.

2 Tighten the motion sensor

