

LED Slim Wall Pack

The Slim Wall Pack Light built for industrial and commercial use. It is easy to install and wire. The internal driver well protected against all weather conditions and can easily be accessed for maintenance purposes. The housing is sealed with an industrial great silicon seal to assure a dust and waterproof IP65 rating. To increase the power savings an optional photocell sensor or motion sensor can be provided upon special requests.


Features and Benefits

- Very high efficiency
- Durable and flicker-free driver
- IP65 waterproof protection
- Clip-on structure
- 5 Year Warranty
- Die-cast aluminum housing

Applications



- Highway
- Residential roads and streets
- Parks and parking lots
- Loading areas and sporting venues

Color Temperature



Light Distribution

Type 3

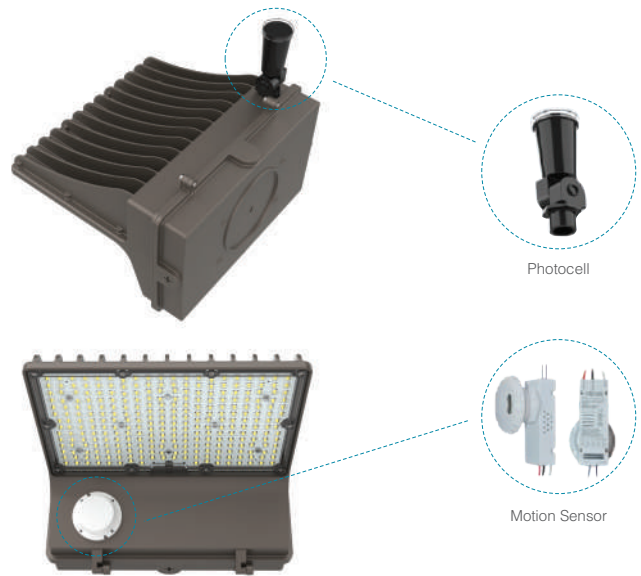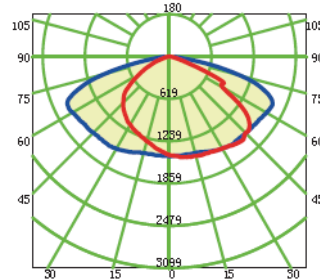

Technical Parameters

| Product Code | Watts | Lumens | Voltage | Dimensions (inch) | Color Temperature | IP | Beam Angle | Warranty | Certificates |
|---------------|-------|---------|-----------|-------------------|----------------------|------|------------|----------|--------------|
| ZL30SWPXXKUL | 30W | 5000lm | 100-277 V | 9.18*9.22*7.43 | 3000-4000-5000-6000k | IP65 | Type 3 | 5 year | UL / DLC |
| ZL40SWPXXKUL | 40W | 6400lm | 100-277 V | 9.18*9.22*7.43 | 3000-4000-5000-6000k | IP65 | Type 3 | 5 year | UL / DLC |
| ZL60SWPXXKUL | 60W | 9600lm | 100-277 V | 9.18*9.22*7.43 | 3000-4000-5000-6000k | IP65 | Type 3 | 5 year | UL / DLC |
| ZL80SWPXXKUL | 80W | 12000lm | 100-277 V | 9.18*9.22*7.43 | 3000-4000-5000-6000k | IP65 | Type 3 | 5 year | UL / DLC |
| ZL100SWPXXKUL | 100W | 16000lm | 100-277 V | 11.11*10.75*7.82 | 3000-4000-5000-6000k | IP65 | Type 3 | 5 year | UL / DLC |
| ZL120SWPXXKUL | 120W | 18000lm | 100-277 V | 11.11*10.75*7.82 | 3000-4000-5000-6000k | IP65 | Type 3 | 5 year | UL / DLC |

- XX Denote the color temperature when is XX = 30 - 40 - 50 - 60, stands for 3000k - 4000k - 5000k - 6000k
- NOTE: Motion sensor / Photocell accessories available upon request
- NOTE: 0-10V Dimmable option available upon special request

Warranty based on 12 hours daily use

For installation and safety notes visit: www.zolulighting.com