



LED Accent Light ETL

LED accent light with multiple beam patterns and retractable shrouds, 360° rotatable and 180° tiltable, ideally suited for accent lighting. Miniature size, unobtrusive appearance. NPT 0.5" stem with choices of mounting accessories allow installation on hard surfaces, lawns and trees. This model is specially designed for medium power of COB LED, compact and widely applied, two kinds of watts for option. Die casting aluminum housing and optimized heat dissipation structure ensure longer lifetime and better stability. Die casting housing, Die casting aluminum cover ring, Stainless steel screws and cover ring, imported silicon rubber ring and High intensity tempered glass. Exterior parts are protected by a thermoset powder coat finish that provides superior resistance to corrosion and weathering.


Features and Benefits

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current, TRIAC dimming standard
Input Voltage	120V/AC
Ambient Temperature	-20°C~45°C
Ingress Protection	IP65

Applications

- Applied in different outdoor areas, such as architectures, buildings, lawn, garden, etc. Precise lighting distribution, various lighting beam angles make it applied in different places and projects. LED accent lights are suitable for wet locations.

Color Temperature

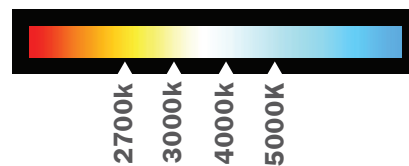

Technical Parameters

Product Code	Watts	Lumens	Voltage	Dimmable	Diameter	Color Temperature	IP	Warranty	Certificates
ZLAL01-4WXXKETL	4W	400lm	120 V	Triac Dim	Ø2.24"	2700-3000-4000-5000k	IP65	5 year	ETL
ZLAL01-8WXXKETL	8W	800lm	120 V	Triac Dim	Ø2.24"	2700-3000-4000-5000k	IP65	5 year	ETL
ZLAL02-10WXXKETL	10W	880lm	120 V	Triac Dim	Ø3.38"	2700-3000-4000-5000k	IP65	5 year	ETL
ZLAL02-15WXXKETL	15W	1320lm	120 V	Triac Dim	Ø3.38"	2700-3000-4000-5000k	IP65	5 year	ETL
ZLAL03-20WXXKETL	20W	2000lm	120 V	Triac Dim	Ø4.72"	2700-3000-4000-5000k	IP65	5 year	ETL
ZLAL03-30WXXKETL	30W	2910lm	120 V	Triac Dim	Ø4.72"	2700-3000-4000-5000k	IP65	5 year	ETL
ZLAL03-40WXXKETL	40W	3720lm	120 V	Triac Dim	Ø4.72"	2700-3000-4000-5000k	IP65	5 year	ETL

• NOTE: XX denote the color temperature when is XX=27-30-40-50, stands for 2700k-3000k-4000k-5000k

• NOTE: Different finish colors and mounting accessories available upon request.


Warranty based on 12 hours daily use

For installation and safety notes visit: www.zolulighting.com


Product Code Dimensions




ZLAL01-4WXXKETL
ZLAL01-8WXXKETL



Front




Side

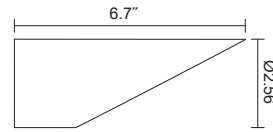


Angled Retractable Shroud




ZLAL02-10WXXKETL
ZLAL02-15WXXKETL



Front

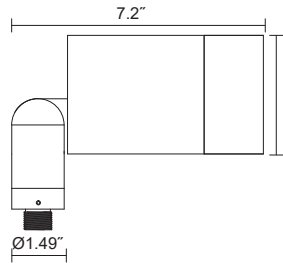


Side

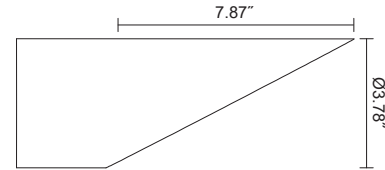


Angled Retractable Shroud




ZLAL03-20WXXKETL
ZLAL03-30WXXKETL
ZLAL03-40WXXKETL



Front

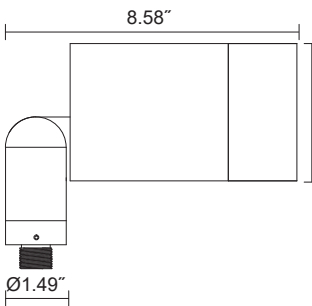

Side

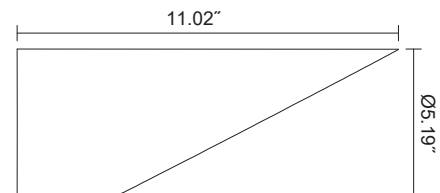


Angled Retractable Shroud

Mounting Accesories and Optional Housing Colors



Ground Mountig Spike

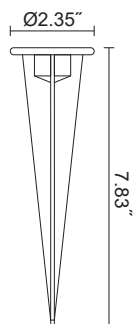

Black
RAL9011



White
RAL9016



Gray
RAL7012



Mineral
Bronze



Silver
RAL9006