



LED Ceiling Mount Cylinder

This architectural LED Ceiling Mount Cylinder provides versatile, low-glare lighting. Due to its IP65 protection, this product is for either indoor or outdoor and suitable for commercial or retail use. Can be used to accent, enhance, and improve any area lighting scheme. Diecast aluminum front cover ring and base, high intensity tempered glass, imported silicone rubber ring, and stainless steel screws and aluminum plate, this fixture is made to last. Exclusively designed for downlighting, the LED Ceiling Mount Cylinder family offers a broad palette of architectural lighting solutions with a consistent appearance, quiet ceiling design, and optical performance.



Features and Benefits


- ETL and CE Certificate
- 5 Year warranty
- Different beam angle options
- IP65 Protection
- Universal voltage

Applications


- Shopping Centers and Shops
- Restaurants
- Receptions
- Galleries and hallways
- Living room and dining room




ZLCC4WXXKETL

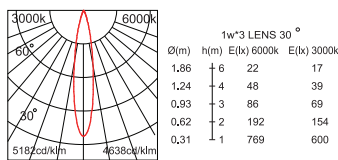


ZLCC11WXXKETL // ZLCC15WXXKETL

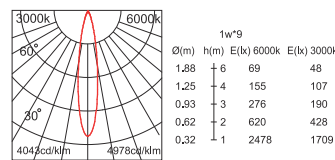

ZLCC24WXXKETL

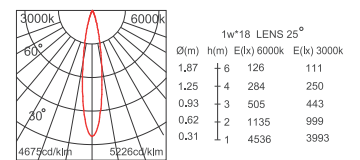

Color Temperature

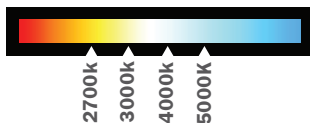

Technical Parameters

Product Code	Watts	Lumens	Voltage	Dimensions	Color Temperature	IP	Beam Angle	Warranty	Certificates
ZLCC4WXXKETL	4W	400lm	100-277 V	ø95*185mm	2700K-3000K-4000K-5000K	IP65	25° **	5 year	ETL / CE
ZLCC11WXXKETL	11W	1200lm	100-277 V	ø160*318mm	2700K-3000K-4000K-5000K	IP65	25° **	5 year	ETL / CE
ZLCC15WXXKETL	15W	1600lm	100-277 V	ø160*318mm	2700K-3000K-4000K-5000K	IP65	25° **	5 year	ETL / CE
ZLCC24WXXKETL	24W	2500lm	100-277 V	ø200*366mm	2700K-3000K-4000K-5000K	IP65	25° **	5 year	ETL / CE

• NOTE: XX denote the color temperature when is XX = 27 - 30 - 40 - 50, stands for 2700K - 3000K - 4000K - 5000K

• NOTE: Triac Dimming and 0-10V Dimming available upon request

• NOTE: ** Special Beam Angle available upon request (2° - 15° - 38° - 45° - 60°)

Warranty based on 12 hours daily use

For installation and safety notes visit: www.zolulighting.com