



Designs with High premium precision injection technology with highest level fire-resistant plastic material (94V-0) and antioxidative shell prevent any potential risk. ETL Listed, conforms to American and Canadian Electrical Code. No fliers or dust could go inside. The 5CCT ceiling light fixture brings you a modern residential lighting solution. The color temperature is at a range of 2700K, 3000K, 3500K, 4000K and 5000K by using a CCT Dip-switch mounted on the back of the fixture easily. Fits all your need for the environment light. Ideal for new constructions, remodels or retrofit installations.

LED Flush Mount Ceiling Fixture 5CCT

Features and benefits

- ZOLU Lighting quality and reliability
- High premium precision injection technology with highest level fire resistant plastic material (94V-0) and antioxidative
- IP44 protection. Suitable for damp locations
- Integral designed housing with high thermal conductivity materials
- Integrated heat sink designed to conduct heat away directly from the LED Circuit Array, keeping the junction temperatures below specified maximums even when installed in insulated ceiling environments
- Smooth flicker free deep dimming from 100% to 5%. No Noise
- No flashing when dimming. High efficiency and no pixilation
- Fits to 4" octagonal box or direct to the ceiling

Applications

- Shopping center, business buildings
- Residential areas


Technical specifications

Product code	Power	Light output	Size (in.)	Dimensions
ZL15WSF07CCT-WH	15W	1500-1650lm	7"	Ø180x17mm

• The addition at the end of the code **-277**, stands for **100-277V** input voltage and **0-10V dimmable**. Available under special request.

• Black finish color available under special request.

• NOTE: To change the color temperature, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.



2700K•3000K•3500K
4000K•5000K

Main voltage	120V 50/60Hz
Efficiency	100-110lm/W
CCT	2700K / 3000K / 3500K / 4000K / 5000K changeable
CRI	>80
Beam angle	110°
IP rating	IP44
Housing	Precision injection plastic (94V-0) and antioxidative.
Dimmable	Triac Dimmable
Certificates	ETL / Energy Star
Warranty	5 Year

LED Flush Mount Ceiling Fixture 5CCT

WARNING


1. Read all product labels and directions.
2. Risk of fire or electric shock. LED DOWNLIGHT installation requires knowledge of luminaires electrical system.
3. Use a qualified electrician for installation of this lighting fixture.
4. Before installing the fixture disconnect power by shutting off the circuit breaker or by removing the fuse at the fuse box.
5. All electrical connections must be in accordance with local and National Electrical Code.
6. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
7. Intended for mounting in an indoor application only. Suitable for damp locations.
8. Switch ON only after complete installation and examination of the circuit.



Turn OFF power supply before starting any installation or maintenance.
Read instructions and check you have all the tools and accessories to complete the installation correctly.



Mounted installation

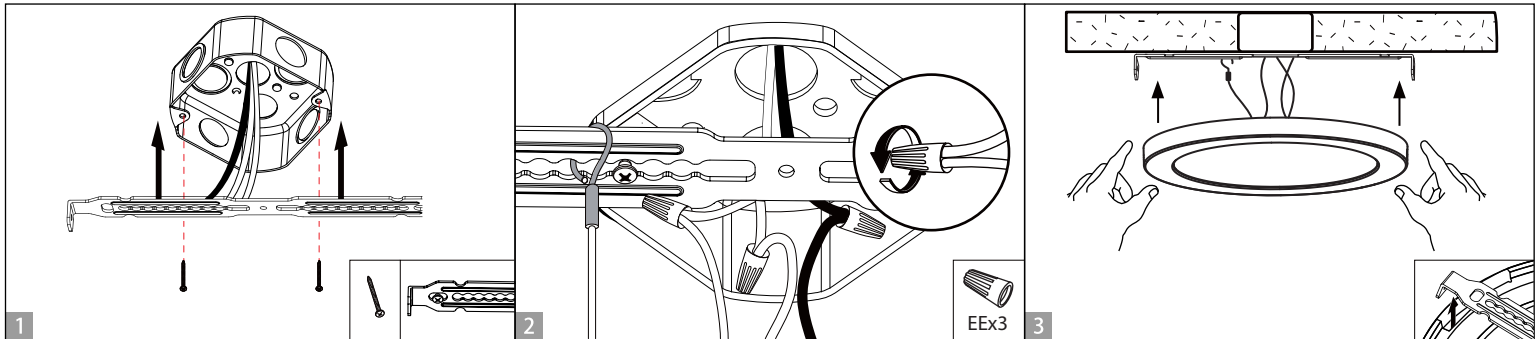

1. Turn off the main power before installation.
2. Using the box screws (GG), secure the mounting bracket to the junction box (J-Box).
3. To make installation easier, pre-attached support wire is located on the back of the fixture. Attach the hook end through the center hole of the mounting bracket to suspend the fixture in place while the wire connections are made.
4. Connect the wires of the ceiling light to the wires on junction box, L-L, N-N, GND-GND.
5. Leave the support wire attached to the mounting bracket. Align the mounting slots on the back of the fixture with the metal tabs on the mounting bracket. Until the tabs click and lock into place and the fixture is secure.
6. Restore main power.

Embedded-in installation

