



Designed to highlight detail through the adjustable trim rotation feature, ZOLU Lighting Special Trim fixture combined with LED Modular Spot 5CCT can produce general and accent lighting. In addition, the variety of models and shapes available in a black or white finish and the 5CCT feature of the LED Module that allows to change the light color temperature, make it the perfect option to suit the requirements for any lighting project.

LED Modular Spot 5CCT

Trims options available



Technical specifications

Product code	Finish	Dimensions	Cut-out
ZLMS-R01-XX	Black / White	ø108x33mm	ø95mm
ZLMS-S02X1-XX	Black / White	105x105x52mm	95x95mm
ZLMS-R02-XX	Black / White	ø100x64mm	ø90mm
ZLMS-R04-XX	Black / White	ø81x55mm	ø75mm
ZLMS-R05-XX	Black / White	ø84x36mm	ø75mm
ZLMS-R06-WH	White	ø135x53mm	ø85mm
ZLMS-R07-WH	White	ø92x37mm	ø75-80mm
ZLSF01-S-XX	Black / White	80x80x240mm	/
ZLSF02-R-XX	Black / White	ø78x240mm	/

Accessories available for ZLSF01-S-XX / ZLSF02-S-XX

Product code	Description
ZLSF-R-BASE-XX	Hanging kit base, round shape, 2m long electrical cable. Ø110x25mm
ZLSF-S-BASE-XX	Hanging kit base, square shape, 2m long electrical cable. 110x110x25mm

• XX denote the finish color. When is XX=BK/WH, stands for Black (BK) or White (WH).

Nominal tension	12V / 100-240V
Nominal frequency	60 Hz
Suggested lamp	LED Modular Spot 5CCT / GU10 / MR16
Operation temperature	0°C - 40°C
Cut out size	Varies
Material	Alluminum 6063
Finish	Matt white / Matt black
Certificates*	CE
Warranty**	1 Year

* CE certificate for trims only. When in combination with LED Modular Spot 5CCT: ETL, RoHS, CE, Energy Star.

** 1-year Warranty for trims only. When in combination with LED Modular Spot 5CCT, the warranty is 5 years.

• NOTE: LED Modular Spot 5CCT, NOT included. Sold separately.



LED Modular Spot 5CCT 12W / 18W


WARNING

1. Read all product labels and directions.
2. Risk of fire or electric shock. LED Modular Spot installation requires knowledge of luminaries electrical system.
3. Use a qualified electrician for installation of this lighting fixture.
4. Before installing the fixture disconnect power by shutting off the circuit breaker or by removing the fuse at the fuse box.
5. All electrical connections must be in accordance with local and National Electrical Code.
6. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation
7. Intended for mounting in an indoor application only. Suitable for damp locations.
8. Switch ON only after complete installation and examination of the circuit.




Turn OFF power supply before starting any installation or maintenance.
Read instructions and check you have all the tools and accessories to complete the installation correctly.

Recessed Mounted installation

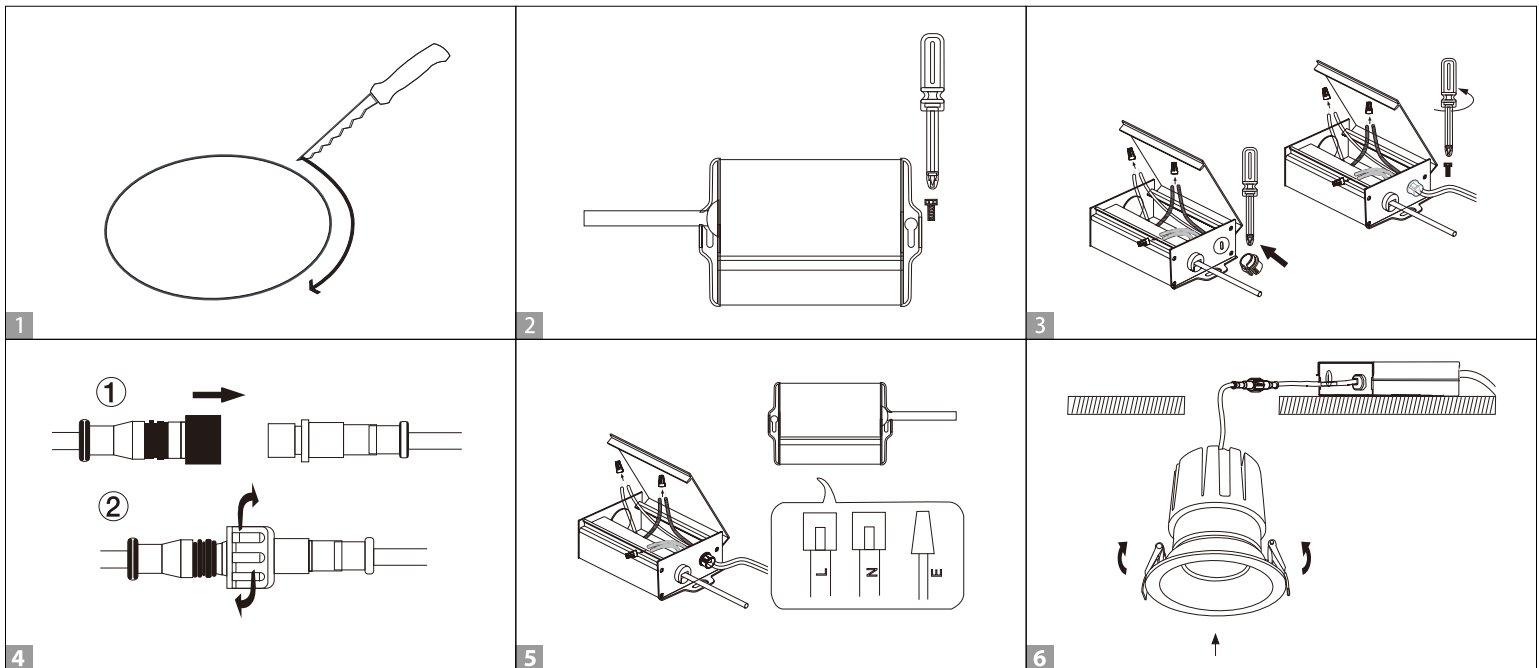

• NOTE: To change the color temperature, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.



5-CCT means white color tunable
Via a Dip Switch mounted in Junction box

