



As an extremely durable and highly vigorous light fixture, the LED Office linear Light is the ideal solution for receptions, work areas, libraries, etc. With an elegant design and form, featuring innovative 3CCT selectable technology designed to offer exceptional light quality and high color consistency that lets you change the color temperature from 3000K to 5000K, is the perfect option to help create an attractive and modern space. The fixture is easy to install and can product general lighting as well as circulation lighting.


LED Office Linear Light UP Module

Features and benefits

- ZOLU Lighting quality and reliability
- Seamless splicing design
- High luminous flux
- Highly energy efficient - up to 110lm/W
- Operating ambient temperature -20°~+45°C
- Suitable for damp locations (indoor)

Applications

- Work areas, office and home, receptions
- Shopping mall, on desks, libraries



Technical specifications

Product code	Power	Light output	Size	Finish
ZL25WLL2D3CCTUM-	25W	2200-2700lm	60cm / 2ft	White
ZL25WLL2D3CCTUM-	25W	2200-2700lm	60cm / 2ft	Black
ZL50WLL4D3CCTUM-	50W	4650-5250lm	120cm / 4ft	White
ZL50WLL4D3CCTUM-B	50W	4650-5250lm	120cm / 4ft	Black
ZL100WLL8D3CCTUM-	100W	9000-10600lm	240cm / 8ft	White
ZL100WLL8D3CCTUM-BK	100W	9000-10600lm	240cm / 8ft	Black

• NOTE: The addition of -EB at the end of the code, stands for Emergency Battery. 15W, 90min.

UP Light Module Technical specifications

Product code	Power	Light output	Suitable for	Voltage
ZLLL2-UM	7.5W	675-825lm	2ft	DC30-40V 50/60Hz
ZLLL4-UM	15W	1350-1650lm	4ft	DC30-40V 50/60Hz
ZLLL8-UM	30W	2700-3300lm	8ft	DC30-40V 50/60Hz

• NOTE: To change the color temperature, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.



Main voltage	120-277V 50/60Hz
Power factor	>0.9
Efficiency	±110lm/W
CCT	3000K / 4000K / 5000K Adjustable
CRI	Ra>80
Lens angle	110°
Dimensions	2ft 602x57x76mm / 4ft 1212x57x76mm / 8ft 2400x57x76mm
Dimmable	0-10V Dim
Certificates	ETL
Life span	50,000hrs
Warranty	5 Year



Accessories Options

Product code	Description
ZLLL-S-KIT-XX	Linear Light Suspended installation accessory set
ZLLL-R-KIT	Linear Light Recessed installation accessory set
ZLLL-LINK-KIT	Linear Light Linkable connection accessory set
ZLLL-COVER	Linear Light Flexible Cover per meter



As an extremely durable and highly vigorous light fixture, the LED Office linear Light is the ideal solution for receptions, work areas, libraries, etc. With an elegant design and form, featuring innovative 3CCT selectable technology designed to offer exceptional light quality and high color consistency that lets you change the color temperature from 3000K to 5000K, is the perfect option to help create an attractive and modern space. The fixture is easy to install and can product general lighting as well as circulation lighting.

LED Office Linear Light L shape

Features and benefits

- Zolu Lighting quality and reliability
- Seamless splicing design
- High luminous flux
- Highly energy efficient - up to 180lm/W
- Operating ambient temperature -20°~+45°C
- Suitable for damp locations (indoor)

Applications



- Work areas, office and home, receptions
- Shopping mall, on desks, libraries

Technical specifications

Product code	Power	Light output	Finish
ZL10CWLLD3CCT-L-SHAPE-	10W	600-1000lm	White
ZL10CWLLD3CCT-L-SHAPE-	10W	600-1000lm	Black

Accessories Options

Product code	Description
ZLLL-S-KIT	Linear Light Suspended installation accessory set
ZLLL-R-KIT	Linear Light Recessed installation accessory set
ZLLL-LINK-KIT	Linear Light Linkable connection accessory set
ZLLL-COVER	Linear Light Flexible Cover per meter

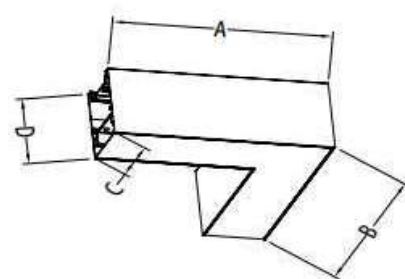

Main voltage	120-277V 50/60Hz
Power factor	>0.9
Efficiency	100lm/W
CCT	3000K / 4000K / 5000K Adjustable
CRI	Ra>80
Lens angle	110°
Dimensions	A200*B200*C57*D76mm
Dimmable	0-10V Dim
Certificates	ETL
Life span	50,000hrs
Warranty	5 Year

• NOTE: To change the color temperature, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.



LED Office Linear Light Installation


WARNING

1. Use a qualified electrician for installation of this lighting fixture.
2. Before installing the fixture disconnect power by shutting off the circuit breaker or by removing the fuse at the fuse box.
3. All electrical connections must be in accordance with local and National Electrical Code.
4. Switch ON only after complete installation and examination of the circuit.



Turn OFF power supply before starting any installation. Read instructions and check you have all the tools and accessories to complete the installation correctly.


Surface Mounted installation

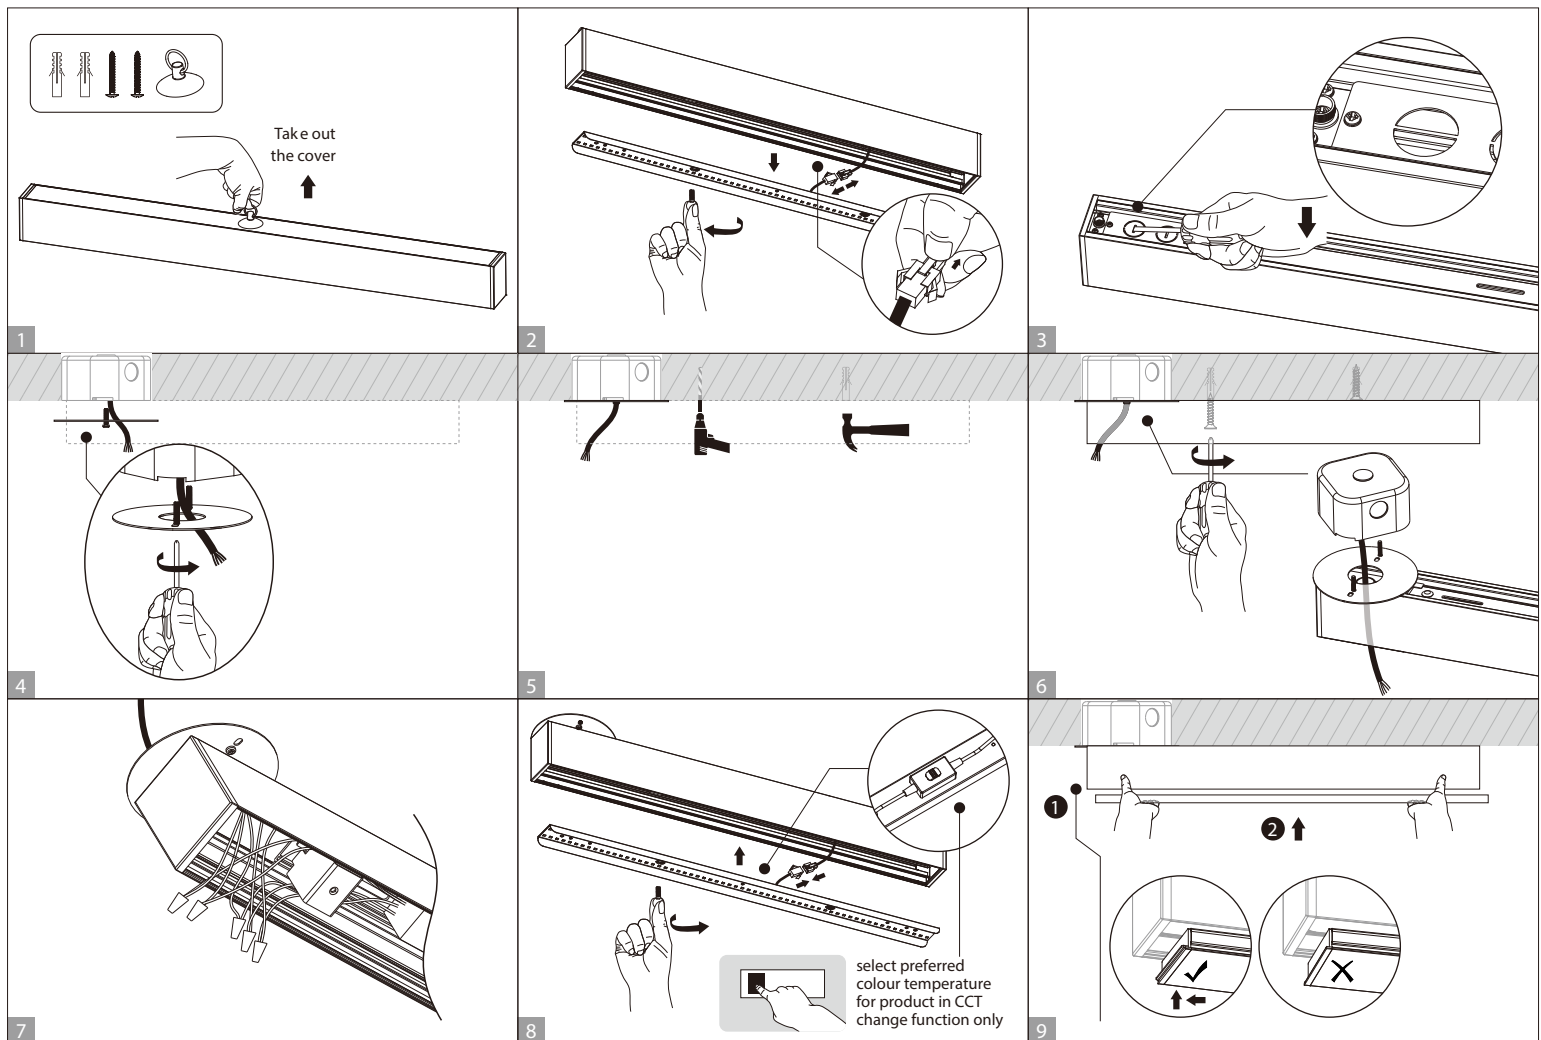

• NOTE: To change the color temperature, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.

LED Office Linear Light Installation


Suspended installation

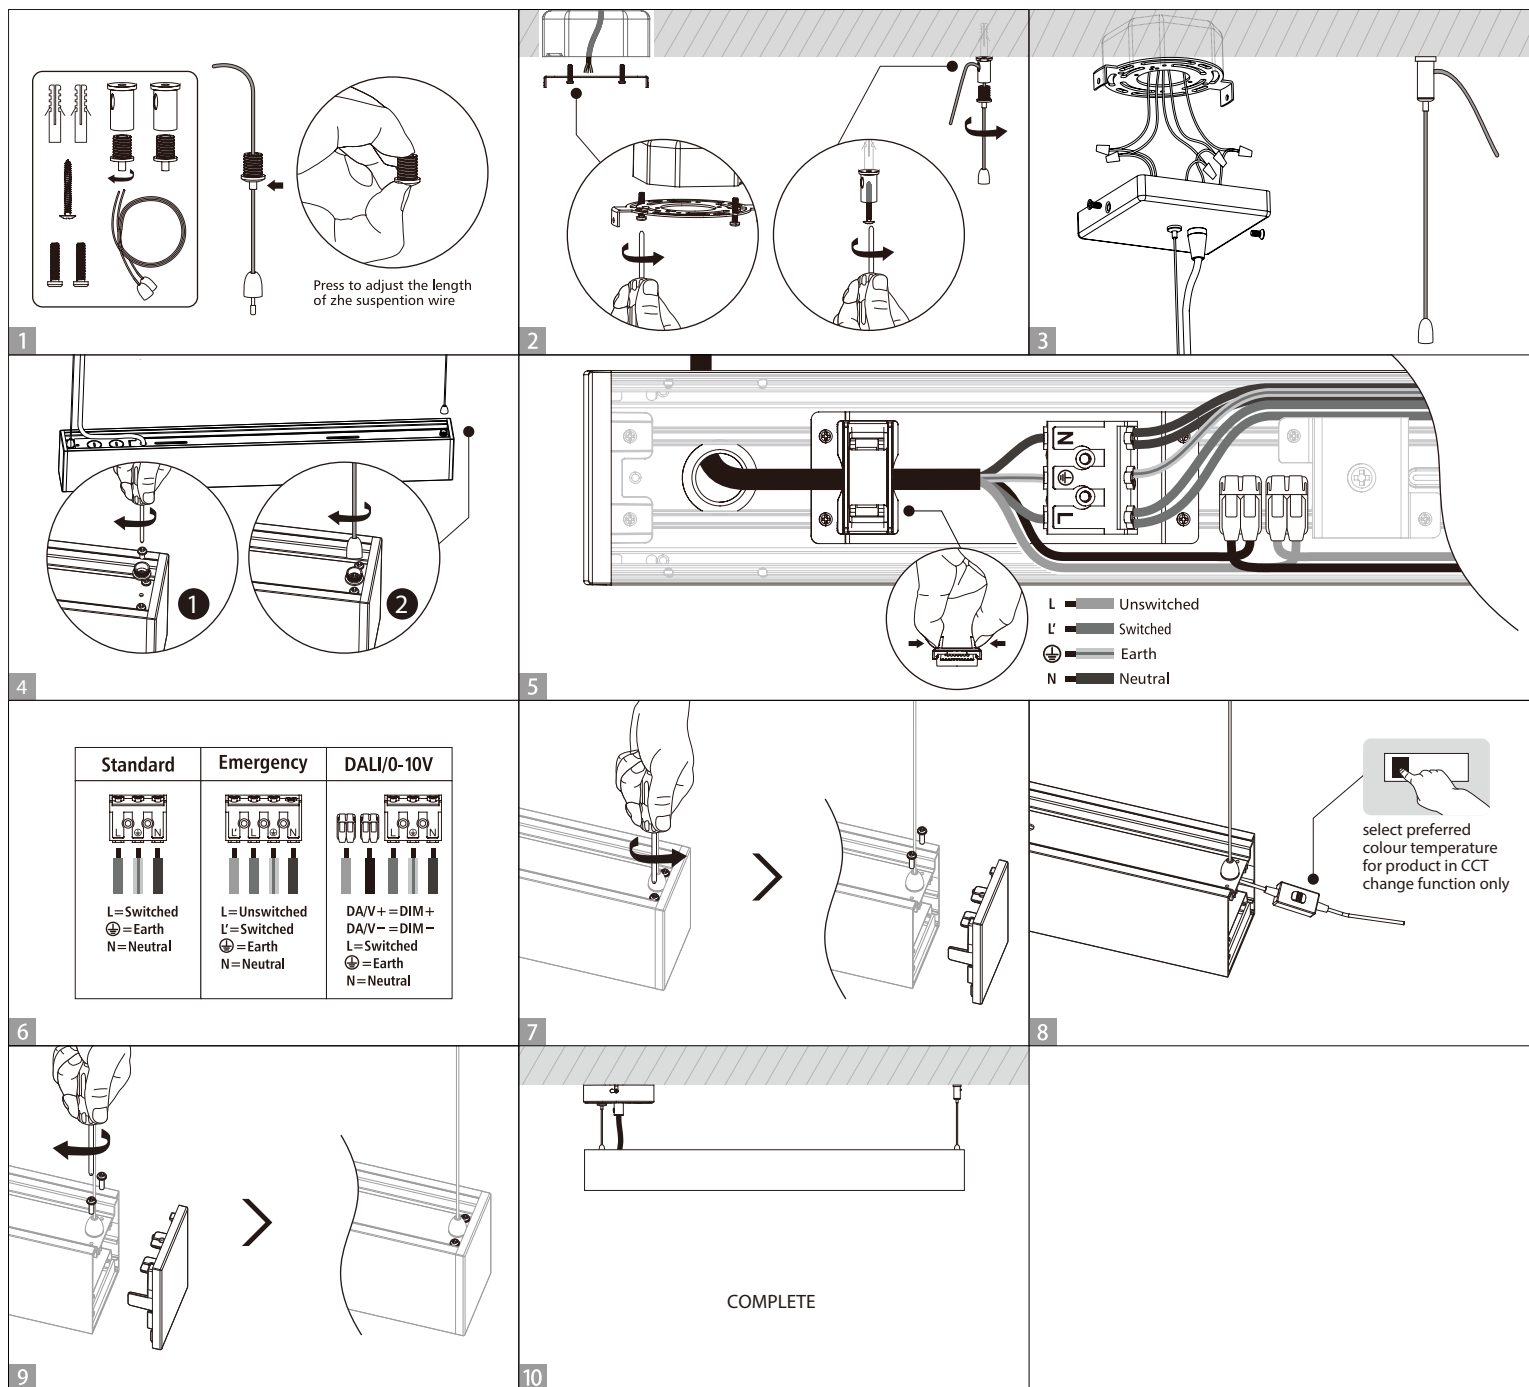

• NOTE: To change the color temperature, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.

LED Office Linear Light Installation


Recessed installation

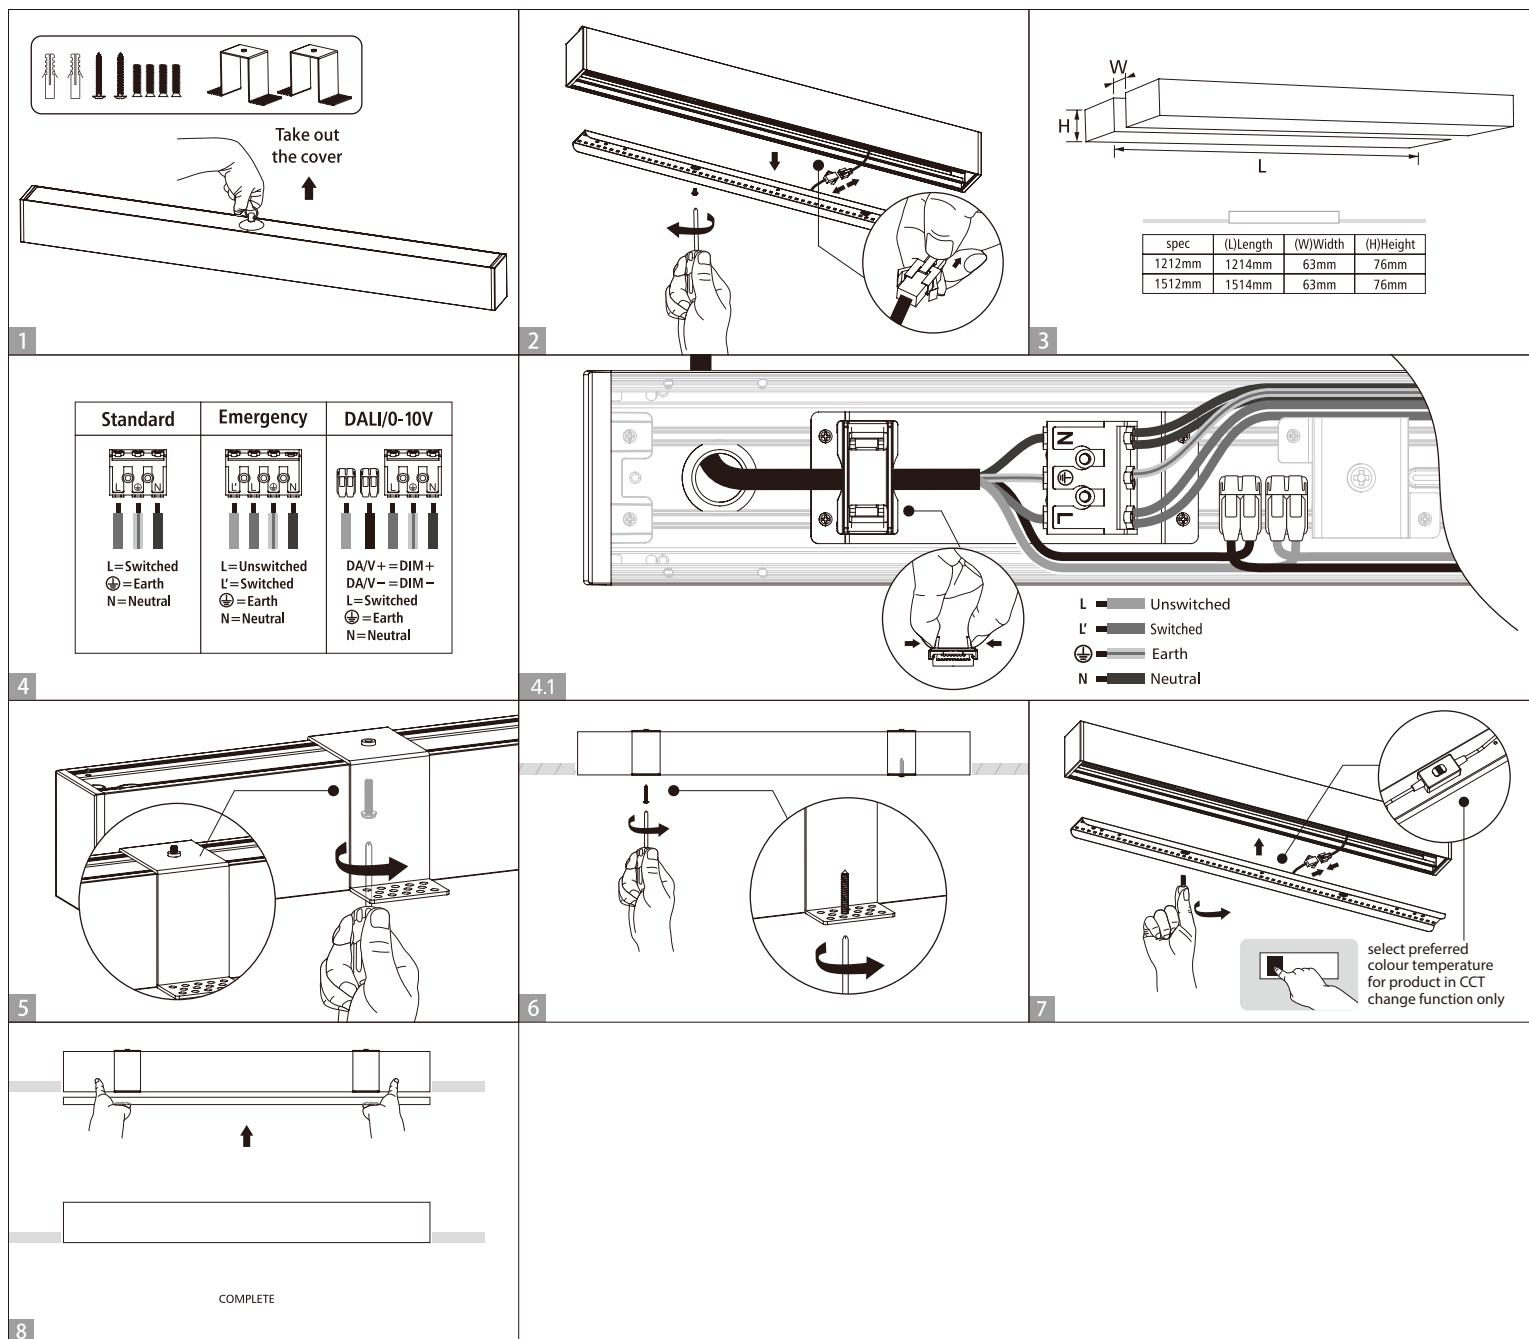


• NOTE: To change the color temperature, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.

LED Office Linear Light Installation

Splicing Mounting Steps

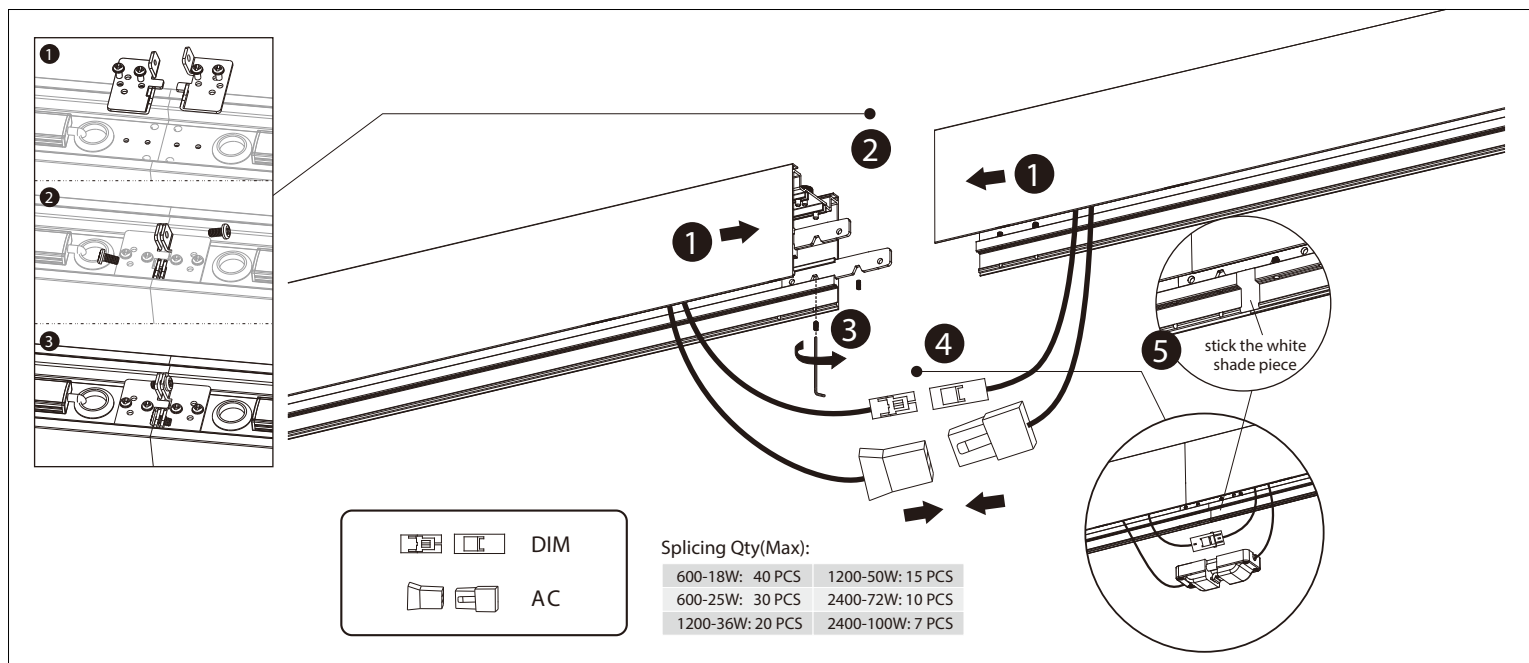

L Shape lamp installation steps

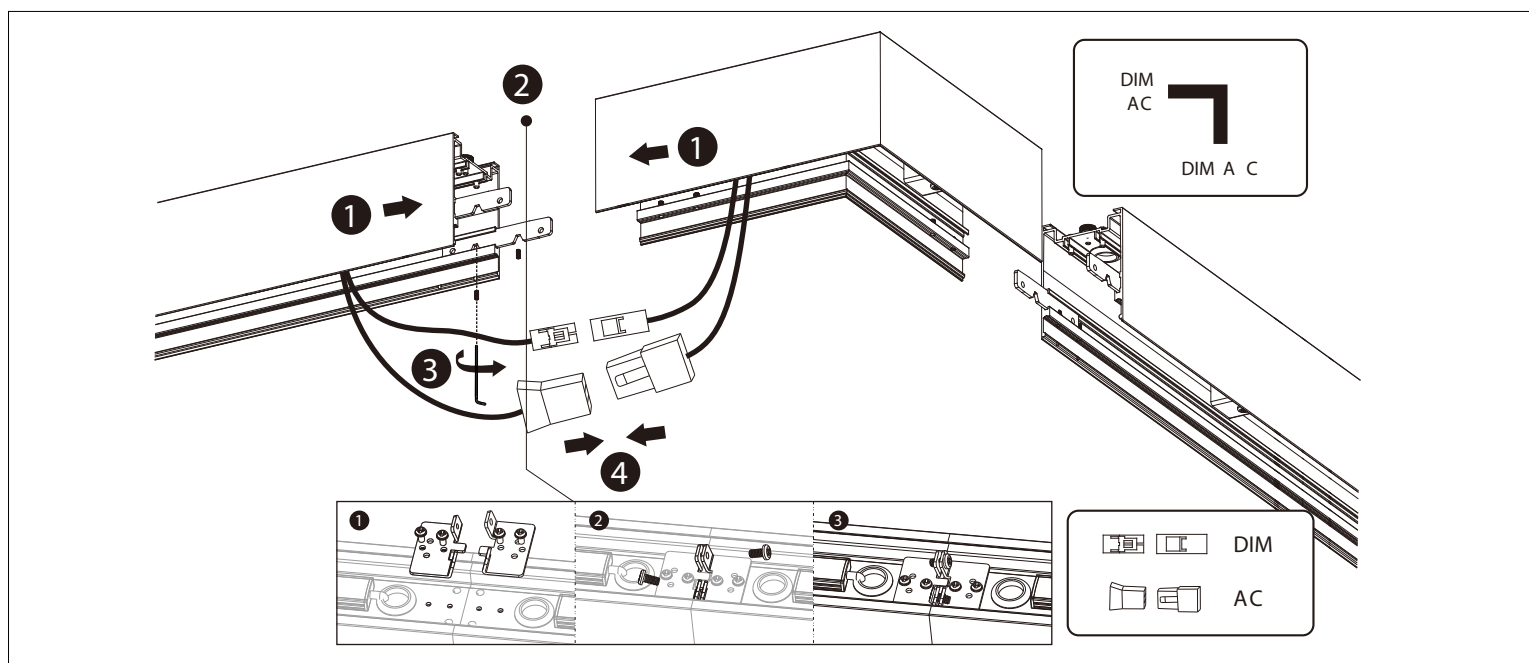

• NOTE: To change the color temperature, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.