



CE

The ZOLU Lighting LED COB Strip Light IP67 creates new and exciting vibrant color lighting effects that were once impossible to achieve. Ideal for cove, pelmet, shelf, or wardrobe lighting or commercial applications, like product displays, under counter lightings, and others. Can be used to reduce the energy consumed while also reducing the heat put off by traditional overhead lighting.

LED COB Strip Light IP67

Features and benefits

- ZOLU Lighting quality and reliability
- IP67 for indoor and outdoor use
- Excellent heat dissipation with modern and durable design
- Highly energy efficient - up to 80lm/W
- No harm to human eyes
- Different color temperature available

Applications

- Architectural decorative lighting
- Amusement park, theater and aircraft cabin mood lighting
- Emergency hallway and exit path lighting
- Archway, canopy, bridge edge lighting and backlighting for signage letters



Technical specifications

Product code	Power*	Light output	CCT	Dimensions
ZLCOB10W30K120VIP67	10W	800lm	3000K	(h)7mm x (w)14mm
ZLCOB10W40K120VIP67	10W	800lm	4000K	(h)7mm x (w)14mm
ZLCOB10W50K120VIP67	10W	800lm	5000K	(h)7mm x (w)14mm


* 10W per meter

Accessories	
ZLSPower720W	LED Strip Light power cord. 720W max. 100-130V~60Hz, ETL
ZLSD120V720WIP20	LED controller for Strip Light. 720W max. 100-130V~60Hz, ETL
ZLS2PIN	Two pin for single color LED Strip Light
ZLSEND	End cap for single color and RGB LED Strip Light
ZLS2XPIN	Two pin middle connector for single color LED Strip Light
ZLS2XPINCABLE	Two pin middle connector for single color LED Strip Light with cable
ZLSPINL	L shape middle connector for LED Strip Light
ZLSMCLIP	Mounting clips for single color and RGB LED Strip Light


• NOTE: When cutting strip into shorter sections, sealant and silicone end cap must be properly installed to maintain IP67 rating.

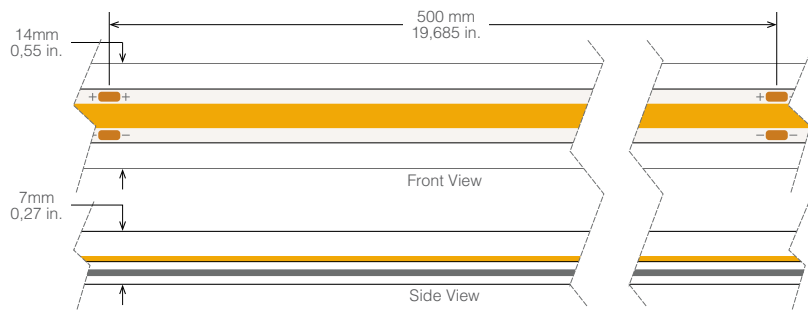

Bends less than 10mm will damage circuit traces and void warranty.




Bending strips at sharp angles will damage circuit traces and void warranty.



Bending strips on horizontal plane will damage circuit traces and void warranty.

Main voltage	100-130V
LED type	COB (420 LED Qty/m)
IP rating	IP67
CRI	Ra >80
Beam angle	120°
Dimmable	Yes
Cut length	50 centimeters
Maximum length	50 meters
Operating temperature	-15°C to 40°C
Certificates	CE - Comply standard ETL
Warranty	2 year



CE