



The LED Single Color Neon Light it's a modern alternative that simulates the effect and looks of traditional glass neon without the hassles and dangers associated with, like toxic gases and fragile tubes. Made off flexible milky PVC, filled with highly luminous LED lights (120pcs per meter), and pure copper wire, that allows you to install it due to its IP67 feature safely in almost any place and for a whole host of outdoor projects, to create a stylish lighting feature, or simply as effective task lighting. With its long lifespan, energy efficiency, and low maintenance, you can explore limitless installation possibilities with the LED Single Color Neon Light.


LED Single Color Neon Strip Light

Features and benefits

- ZOLU Lighting quality and reliability
- IP67 for indoor and outdoor use
- Excellent heat dissipation with modern and durable design
- No harm to human eyes
- PVC cover and pure copper wire
- Working temperature range from -15°C to 40°C

Applications

- Architectural decorative lighting
- Amusement park, theater and aircraft cabin mood lighting
- Emergency hallway and exit path lighting
- Archway, canopy, bridge edge lighting and backlighting for signage letters



Technical specifications

Product code	Power*	Light output*	CCT	Dimensions
ZL9WN30KIP67	9W	850lm	3000K	(h)1.7mm x (w)0.8mm
ZL9WN40KIP67	9W	850lm	4000K	(h)1.7mm x (w)0.8mm

*Per meter




Accessories	
** ZLSPOWERN360W	Power Cord for LED Single Color Neon Light. North American plug
ZLN2PIN	BL-2 Pins-A, Two pin for LED Single Color Neon Strip Light
ZLNEND	End cap for LED Single Color Neon Strip Light
ZLNMCLIP	Mounting clips for LED Single Color Neon Strip Light

** 1 year warranty



• NOTE: DO NOT water immerse, voids the warranty.

• NOTE: When cutting strip into shorter sections, sealant and silicone end cap must be properly installed to maintain IP67 rating.

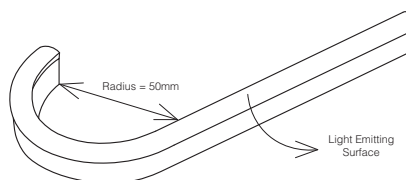

Stretching the strip light will damage circuit traces and void warranty.



Distortion or bends at sharp angles will damage circuit traces and void warranty.



Bending strips on vertical plane and trampling over will void warranty.

Main voltage	100-130V
LED type	5050 SMD
IP rating	IP67
CRI	Ra >80
Beam angle	120°
Dimmable	Max. 25 meters
Cut length	50 centimeters
Maximum length	50 meters
Operating temperature	-15°C to 40°C
Certificates	ETL
Warranty	2 year