



ZOLU Lighting LED Troffers Light are ideal for most commercial applications. Our troffers have a unique design and accessories that allow installed them on-or-in most ceiling types, recessed, pendant, surface mount or in suspended ceiling. Designed to minimize glaring and reflections on the work surface, avoiding visual discomfort to meet highest office standards. 5CCT color-tunable technology, and wattage changeable feature, you can truly fit these fixtures into any space. Available in 2x2 & 2x4 sizes.

LED

Troffer 5CCT & Wattage Changeable

Features and benefits




- ZOLU Lighting quality and reliability
- IP20 suitable for damp locations
- >50,000 hours life time
- Highly energy efficient - up to 135lm/W
- Pendant, recessed and surface mounted options
- 5CCT tunnable and Wattage Changeable
- Surge protection: L-N:1KV LN-PG:2KV
- Operating temp. -20°C to 40°C

Applications

- Schools, hospitals, offices, hallways, stairways
- Living room and kitchen, factories, warehouse, industrial facilities

Technical specifications

Product code	Power Selectable	Light output	Size	Dimensions
ZLCWTF2D5CCT	20W / 25W / 30W / 35W / 40W	5400lm max.	2'x2'	603x603mm
ZLCWTF4D5CCT	30W / 40W / 50W / 60W / 72W	9720lm max.	2'x4'	1213x603mm

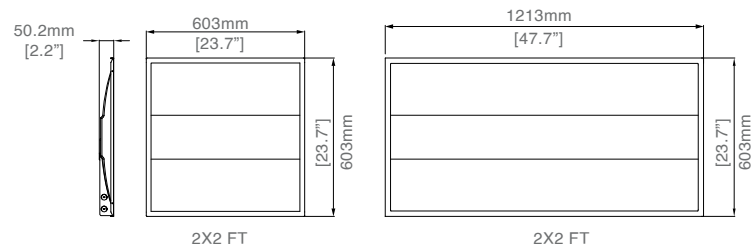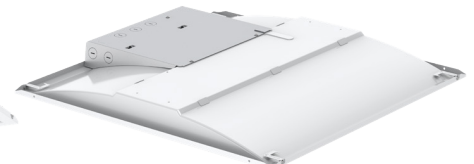

Accessories

- ZLEB25ACT-170 LED emergency driver back up - 25W output, 12W input, ≥90 min.
- ZLEB40ACT-170 LED emergency driver back up - 40W output, 12W input, ≥90 min.

• Flicker free driver and Motion sensor available under special request.

• NOTE: To change the color temperature or wattage, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.

Main voltage	120-277V - 50/60Hz
Efficiency	135lm/W
Power factor	≥0.90
THD	<20%
IP rating	IP20
CCT	3000K/3500K/4000K/5000K/6000K Tunnable
Housing	Steel body and PC lens
Lens angle	120°
Dimmable	0-10V Dim
Certificates	UL - DLC
Warranty	5 Year (50,000 hrs)