



designed for landscapes, pathways, residential, and security applications. Featuring field-adjustable wattage and 3CCT selectable technology, this versatile fixture offers flexibility for multiple project requirements while reducing SKU complexity. Its durable die-cast aluminum housing and IP65 rating ensure long-lasting performance, excellent heat dissipation, and reliable operation in demanding outdoor environments. Standard photocell dusk-to-dawn functionality, high efficacy up to 140lm/W, make it an ideal choice for professional architectural and landscape lighting applications.


LED Accent Flood Light PRO

Features and benefits

- ZOLU Lighting quality and reliability
- High efficacy up to 140lm/W
- IP65 Waterproof rated
- Standard Photocell (dusk-to-dawn function) is included as default
- 3CCT (3000K/4000K/5000K) and Wattages Selectable (25W/20W/15W)
- Die-cast aluminium housing and polycarbonate lens: good heat dissipation and a durable lifetime. Black finish.

Applications

- Residential, landscape lighting, outdoor corridors
- Tree uplighting, walkways & pathways
- Flagpoles, security Lighting
- Architectural wall washing




3000K • 4000K • 5000K

Technical specifications


Product code	Power Selectable	Light output	CCT	Size
ZL25CWAFL4D3CCT-45	25W/20W/15W	3300lm Max.	3000K/4000K/5000K	4"

Optional accessories

Product code	Description	Size
*ZLBASE-AFL-STAKE	Base for stake mounted installation. Black finish	228.6*50mm
ZLBASE-AFL-PLATE	Base for concrete or solid surfaces installation. Black finish	115*26.5mm

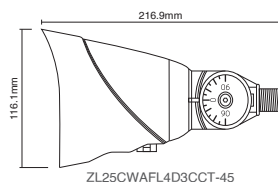

ZL25CWAFL4D3CCT-45



*ZLBASE-AFL-STAKE



ZLBASE-AFL-PLATE



*Stake base included

Main voltage	AC 120-277V, 50/60Hz
Power consumption	140 lm/W
Power factor	≥0.90
THD	<20%
IP rating	IP65
Dimmable	0-10V Dimmable
CRI	Ra 80
Lens angle	45°
Operating temp.	-40°F to 113°F (-40°C to +45°C)
Surge protection	L/N 4KV, L/N-P 4KV
Certificates	UL / DLC
Warranty	5 Year



LED Accent Flood Light PRO

WARNING





1. Read all product labels and directions.
2. Risk of fire or electric shock. LED ACCENT FLOOD LIGHT PRO installation requires knowledge of luminaries electrical system.
3. Use a qualified electrician for installation of this lighting fixture.
4. Before installing the fixture disconnect power by shutting off the circuit breaker or by removing the fuse at the fuse box.
5. All electrical connections must be in accordance with local and National Electrical Code.
6. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation
7. Proper grounding is required to ensure personal safety. Carefully observe the correct grounding procedure under the installation section
8. Switch ON only after complete installation and examination of the circuit.

Turn OFF power supply before starting any installation or maintenance.


Read instructions and check you have all the tools and accessories to complete the installation correctly.

Wiring diagram

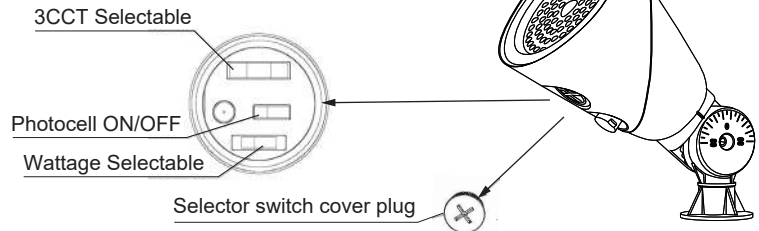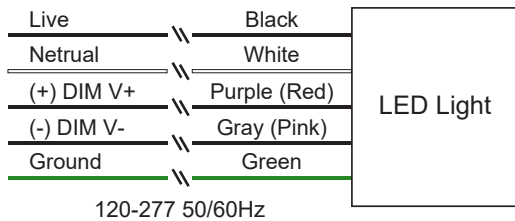

Do not operate with power on. Please turn off the power when adjusting the power or color temperature.

Stake Mounted installation

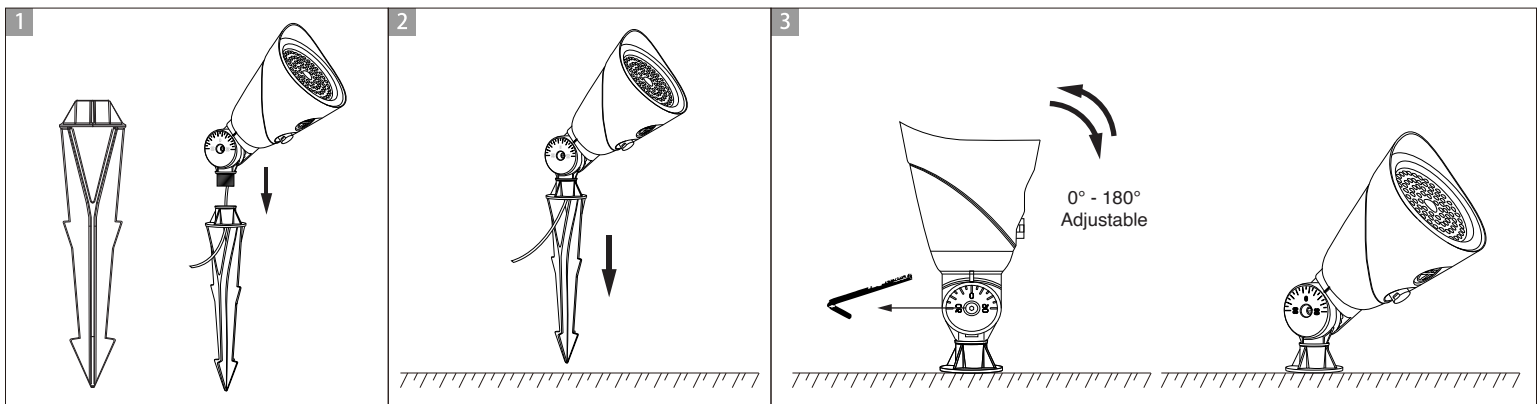

1. Pass the wires through the 1/2 NPT hole, connect the stake to the adapter. Attach the appropriate wires to the light fixture (Please refer to the wiring diagram for the connection) (Recommend to use separately waterproof to prevent water)
2. Strike the stake into the grass.
3. Use a allen wrench to loose the adjustment screw on the adapter connector, tighten all bolts after the angle (0-180°adjustable) is confirmed.

