



Minimalist LED surface-mounted step light featuring 5CCT switchable technology, TRIAC dimming, and IP65 protection for reliable indoor and outdoor performance. Its recessed light source creates a soft, controlled downward illumination ideal for pathways, stairways, courtesy lighting, and architectural accent applications. Engineered with 90CRI, flicker-free operation, and adjustable color temperatures from 2700K to 5000K, this fixture delivers both visual comfort and design flexibility. Available in 2 sizes and finishes, it seamlessly integrates in any environment.


LED Surface Step Light

Features and benefits


- ZOLU Lighting quality and reliability
- Simple and easy installation
- IP65 rated for outdoor and indoor applications
- 2 different sizes & trim color finish options
- Flicker free

Applications

- Pathway, garden, walkway, plinth
- Courtesy lighting and planters
- Architectural accent applications



2700K • 3000K • 3500K
4000K • 5000K

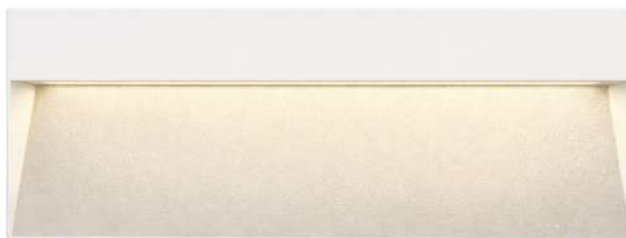

ZL21WSSLC5CCT-SQ-WH



ZL11WSSLC5CCT-SQ-WH



ZL11WSSLC5CCT-SQ-BK




ZL21WSSLC5CCT-SQ-BK


Technical specifications

Product code	Power	Light output	Size
ZL11WSSLC5CCT-SQ-XX	11W	320lm	115x115x28mm
ZL21WSSLC5CCT-SQ-XX	21W	925lm	305x115x28mm

• XX denote the trim finish color. When is XX=WH or BK, stands for White (WH) or Black (BK)



ZL11WSSLC5CCT-SQ-XX

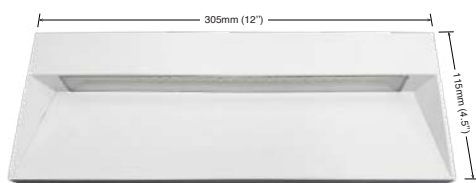

ZL21WSSLC5CCT-SQ-XX



Main voltage	AC120-277V 50/60Hz
Efficiency	29lm/W for 11W model / 44lm/W for 21W model
CRI	90Ra
Beam spread	80°
5CCT	2700K/3000K/3500K/4000K/5000K selectable
Dimmable	Triac dimmable
IP protection	IP65
Lifespan	50,000 hrs
Certificates	ETL
Warranty	5 Year

• NOTE: To change the color temperature, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.

LED Surface Step Light

WARNING

1. Read all product labels and directions.
2. Risk of fire or electric shock. LED DOWNLIGHT installation requires knowledge of luminaires electrical system.
3. Use a qualified electrician for installation of this lighting fixture.
4. Before installing the fixture disconnect power by shutting off the circuit breaker or by removing the fuse at the fuse box.
5. All electrical connections must be in accordance with local and National Electrical Code.
6. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation
7. Intended for mounting in an indoor application only. Suitable for damp locations.
8. Switch ON only after complete installation and examination of the circuit.




Turn OFF power supply before starting any installation or maintenance.


Read instructions and check you have all the tools and accessories to complete the installation correctly.

Surface Mounted installation

1 Install mounting plate (included) into the electrical box with mounting screws (included). Drive screws completely to the end of the junction box.	2 2.1 Connect wires: white to white, black to black, copper to green (ground). 2.2 Set desired color temperature (2700K to 5000K) with switch (power off).	3 Put the wall sconce over the mounting plate and match the holes on the side.	4 Drive screws completely to secure and complete installation.
---	---	---	---

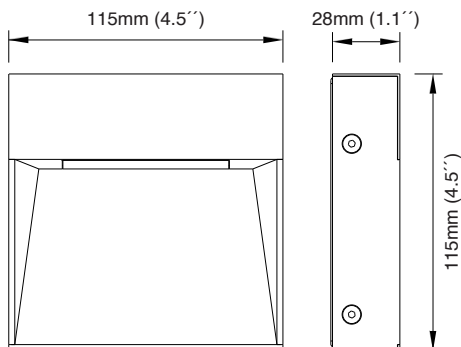

ZL11WSSLC5CCT-SQ-XX

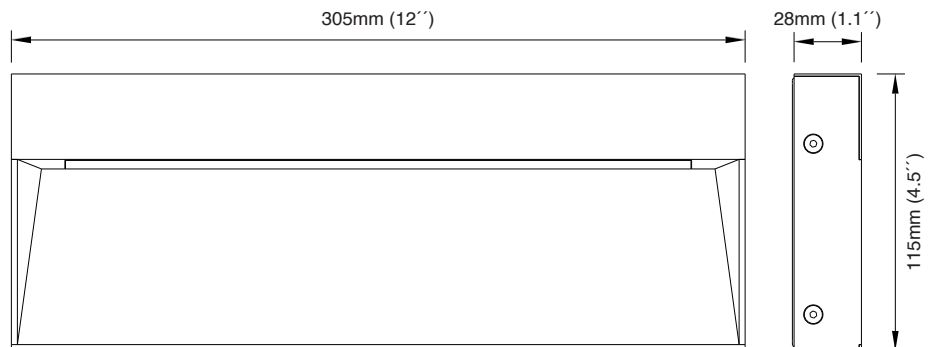

ZL21WSSLC5CCT-SQ-XX

· NOTE: To change the color temperature, first, turn off the fixture before moving the switch. NOT doing this may cause damage to the controller and void the warranty.