



This outdoor bollard light has a unique design. The Modern minimalist design shape and soft light help create an elegant, comfortable, and relaxing environment for any outdoor application or landscaping design. Specially designed for outdoor environments, with multiple processes to ensure reliable quality and IP65-grade protection. The use of a high-quality aluminum lamp body and acrylic lampshade diffuser, strong shell, and effective waterproof, dustproof, and rust-proof make it the ideal option for any outdoor space.



LED Modern Bollard B02

Features and benefits

- ZOLU Lighting quality and reliability
- Modern and avant-garde design
- Waterproof - IP65 rated
- Aluminum body and acrylic lampshade
- Thick aluminum is not easy to oxidize
- Acid and corrosion resistance
- 35,000 hrs lifespan

Applications

- Pathway, garden, walkway
- Landscape lighting design

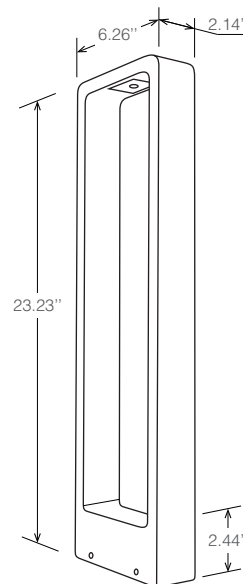

Technical specifications

Product code	Power	Light output	Finish	Dimensions
ZL7WBLL30K-02-60CM	7W	840lm	Black	23.23"x6.26"x2.14"

- NOTE: Fixture(s) wires have to be run in close proximity to fixture(s) and not buried more than 3 inches.
- NOTE: DO NOT install within 10 feet of a pool, spa or fountain.



Main voltage	100-265V AC 50/60Hz
Efficiency	120lm/W
CCT	3000K
CRI	Ra≥80
Housing	Aluminum body / Acrylic lampshade
Protection	IP65 / IK06
Finish color	Black
Cable	Rubber cable with VDE certificate
Cable length	60cm, 3x0.75mm ²
Certificates	ETL
Warranty	3 Year

LED Modern Bollard B02 Installation Instruction


WARNING



1. Before installation, maintenance or lamp replacement, ensure that the mains supply to the luminaire is switched off and the circuit supply fuses are removed or the circuit breaker is turned off.
2. It is recommended that only a qualified electrical contractor carries out the installation of this luminaire and that the luminaire is installed in compliance with the current edition of the IEE Wiring Regulations.
3. The person carrying out the installation is to check and verify that the total load on the circuit, including that of this luminaire does not exceed the rating of the circuit cable, fuse or circuit breaker.
4. Where a luminaire incorporates discharge control gear (inductive load), the circuit capacity and ratings require careful sizing to avoid nuisance tripping of the protective device used in the installation.
5. Where applicable, careful consideration should be taken during installation to ensure that all fixings and/or suspensions are of a suitable size for the luminaire being installed.

- Fixture(s) should be used ONLY with landscape power units that do not exceed 265V.
- All luminaires are only suitable for applications within their rated Ingress Protection limits as stated.
- Fixture(s) must be installed in accordance with all local codes and ordinances.

Installation procedure

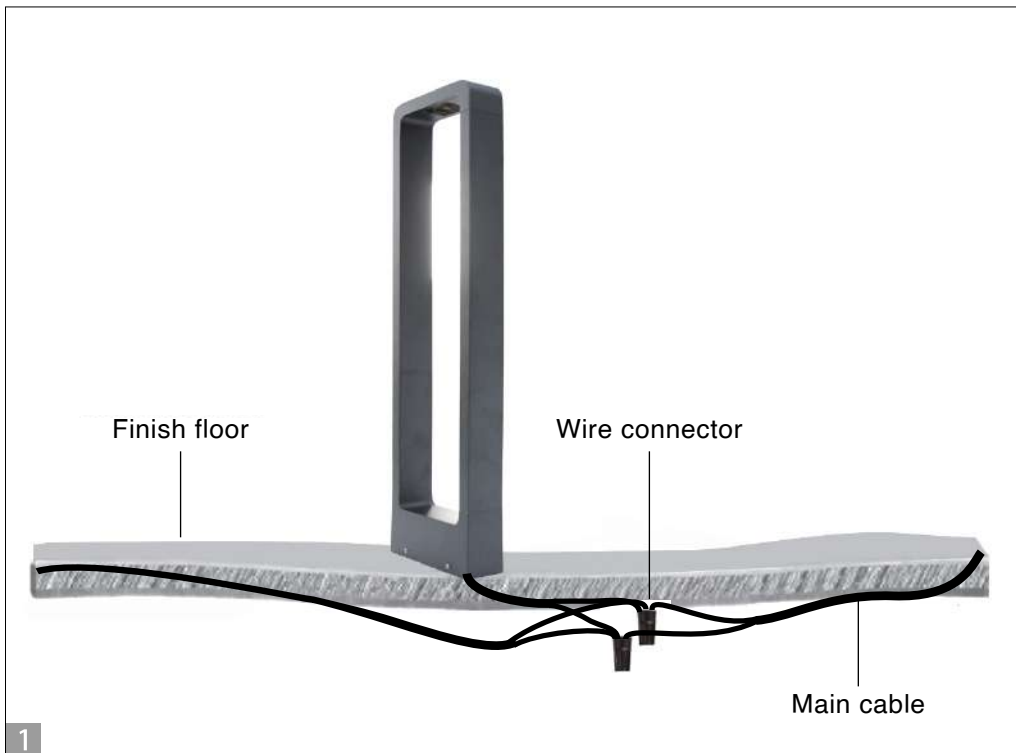

1. Remove the fixture base and connect to the main line. Using ground spike or screws (depends on the model) to secure the base. Fixing fixture and base together.
2. Attach fixture(s) wires to main cable with cable connector suitable for direct burial.

Warning: Fixture(s) wires have to be run in close proximity to fixture(s) and not buried more than 3 inches.

CAUTION

- Turn off / un-plug and allow to cool before touch.
- Lamp gets HOT quickly! Contact only switch/plug when turning on.
- DO NOT touch hot lens, guard enclosure.
- Keep lamp away from materials that may burn.
- DO NOT touch the lamp at any time when on.
- Oil from skin may damage the lamp. Use a soft cloth.
- DO NOT operate the luminaire fitting with a missing or damage shield.
- DO NOT install within 10 feet of a pool, spa or fountain.

We warrants its products to be free of defects in material and workmanship under normal use, when installed in accordance with installation instructions, specifications and accepted trade practices as follows: 3 years limited warranty from date of sale. This warranty excludes:

- Products not used in accordance with directions specified in installations instructions and subject to un-authorized repair.
- Damages caused by accident, alteration, misuse, abuse and exceeding the cost of product.
- Cost incurred in shipment, repair, replace, remove or install of product by buyer and others.

